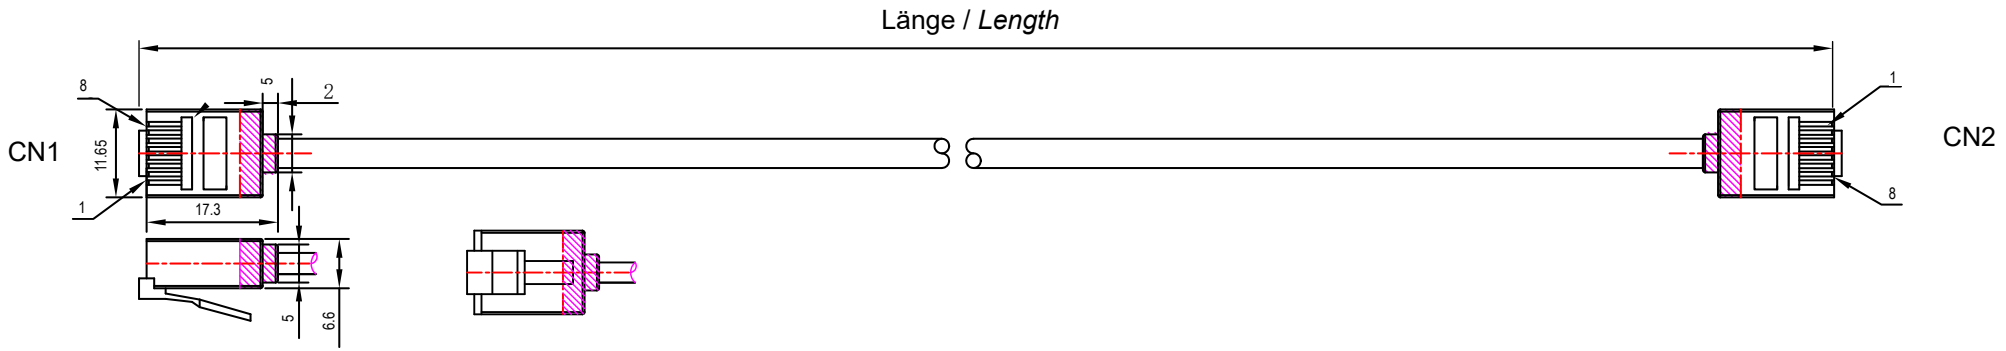

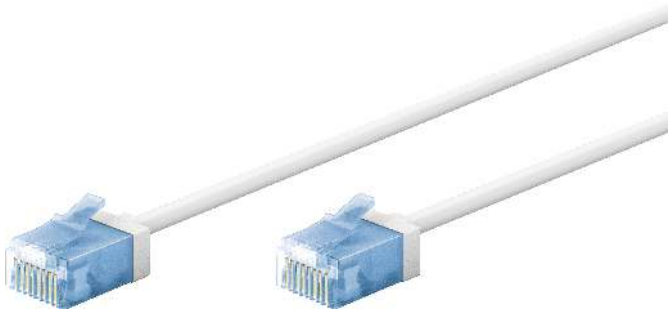

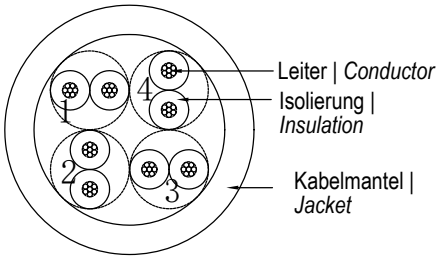

Artikel Nr. | *Item no.*	Beschreibung | *Description*	Länge | *Length*
74244	CAT 6a-0015 U/UTP SLIM LSZH-TPE WEISS 0.15M	150 ± 10 mm
74284	CAT 6a-0025 U/UTP SLIM LSZH-TPE WEISS 0.25M	250 ± 10 mm
74285	CAT 6a-0050 U/UTP SLIM LSZH-TPE WEISS 0.5M	500 ± 20 mm
74286	CAT 6a-0100 U/UTP SLIM LSZH-TPE WEISS 1M	1000 ± 30 mm
74287	CAT 6a-0200 U/UTP SLIM LSZH-TPE WEISS 2M	2000 ± 30 mm
74288	CAT 6a-0300 U/UTP SLIM LSZH-TPE WEISS 3M	3000 ± 50 mm
74299	CAT 6a-0500 U/UTP SLIM LSZH-TPE WEISS 5M	5000 ± 100 mm
74300	CAT 6a-0750 U/UTP SLIM LSZH-TPE WEISS 7.5M	7500 ± 100 mm
74301	CAT 6a-1000 U/UTP SLIM LSZH-TPE WEISS 10M	10000 ± 100 mm
74302	CAT 6a-1500 U/UTP SLIM LSZH-TPE WEISS 15M	15000 ± 150 mm

Verbindungen | *Connections*

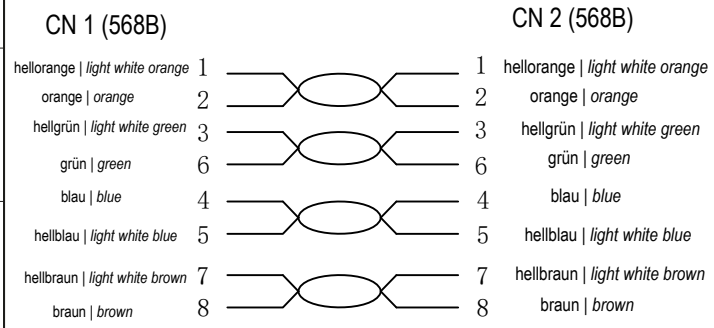

Ultraflexibles CAT 6A Patchkabel, slim, U/UTP, weiß

- Superdünnes LAN-Kabel mit extrakurzen RJ45-Steckern für weniger Kabelvolumen im Serverschrank oder Patchpanel und dadurch eine optimierte Luftzirkulation
- Mit Sicherheit flexibel: Ungeschirmt und mit raucharmem, halogenfreiem TPE-Mantel für einen besonders kleinen Biegeradius und hohe Flexibilität

Anschlüsse:	2x RJ45-Stecker (8P8C)
Material Kontakte:	vergoldet
Knickschutz:	beidseitig
Spezifikation:	CAT 6a
Schirmungsklasse:	U/UTP
Max. Bandbreite:	500 MHz
Kabeltyp:	Rundkabel
AWG:	32/7
Material Kabelmantel:	LSZH-TPE
Durchmesser Kabelmantel:	2,8 ± 0.2 mm
Gehäusematerial:	PVC, transparent blau
Rastnasenschutz:	beidseitig
Kontaktierung:	EIA/TIA-568B
Biegeradius:	> 25,4 mm

Ultra-Flexible CAT 6A Patch Cable, Slim, U/UTP, white

- *Super-thin LAN cable with extra-short RJ45 connectors for a reduced cable volume in the server cabinet or patch panel, resulting in optimised air circulation*
- *Safe and flexible: Unshielded and with a low-smoke, halogen-free TPE jacket for a particularly small bending radius and high flexibility*

Connections:	*2x RJ45 male (8P8C)*
Contacts:	*gold-plated*
Kink protection:	*both sides*
Specification:	*CAT 6a*
Shielding class:	*U/UTP*
Max. bandwidth:	*500 MHz*
Cable type:	*round cable*
AWG:	*32/7*
Cable sheath material:	*LSZH-TPE*
Cable sheath diameter:	*2.8 ± 0.2 mm*
Housing material:	*PVC, transparent blue*
Latch protection:	*both sides*
Contacting:	*EIA/TIA-568B*
Bending radius:	*> 25.4 mm*

Änderungen			Datum	Name
Datum	Name	gez.:	17.06.2024	ir
		gepr.:	17.06.2024	
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung
CAT 6a-XXXX U/UTP SLIM LSZH-TPE WEISS XXXM

goobay®

Blatt **1**

Zeichnungs-Nr.: 74230ff

von **1**