


DATASHEET

DSub jacks 9.4 mm, 90° angled, EURO

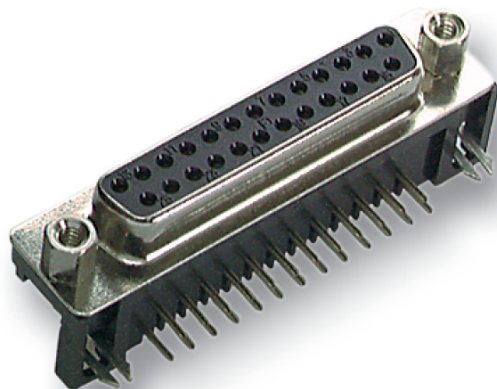

Description

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

General data

Model | jack (jack)

Electrical characteristics

Contact type | female (female)

Connection type | solder

Available variants

Article no.	Title	Number of poles	Type
34701.1	DSub Jack 9.4mm Euro Standard, EDF 09 A/KG-T1	9	EDF 09 A/KG-T1
34702.1	DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1	15	EDF 15 A/KG-T1
34703.1	DSub Jack 9.4mm Euro Standard, EDF 25 A/KG-T1	25	EDF 25 A/KG-T1




This datasheet was created automatically on 19-07-2022 . Technical changes reserved.




DATASHEET

DSub jacks 9.4 mm, 90° angled, EURO

Technical drawings

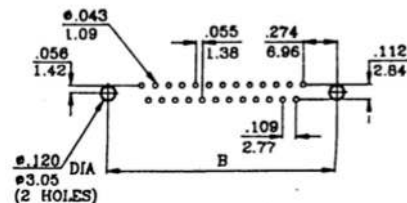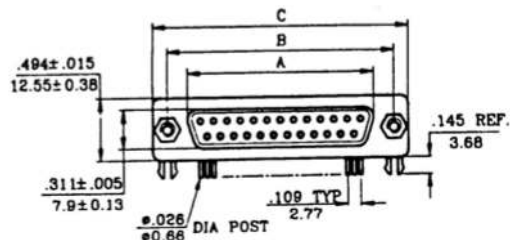

PCB HOLE PATTERNS

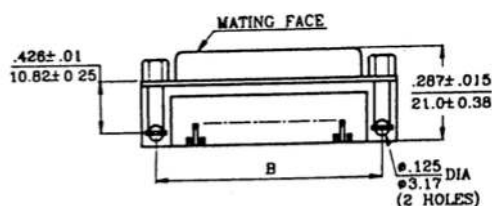

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-0)

DIMENSIONS

SHELL SIZE	A .010 0.25	B .005 0.13	C .015 0.38
9	0.643 16.33	0.984 24.99	1.213 30.81
15	0.971 24.66	1.312 33.32	1.541 39.14
25	1.511 38.38	1.852 47.04	2.088 53.04
37	2.159 54.84	2.500 63.50	2.729 69.32

ORDERING INFORMATION:

POLE	PART NO.
09	34701.1
15	34702.1
25	34703.1
37	34704.1

RoHS COMPLIANT

