



View 170 WS ARGB

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช้



© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.08
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermalright developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermalright's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermalright exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermalright can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermalright.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermalright would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermalright.com/>

Global Facebook
<https://www.facebook.com/ThermalrightInc>

Taiwan Facebook
<http://www.facebook.com/ThermalrightTW>

Global community forums
<http://community.thermalright.com>

CONTENTS

Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Dimension & Clearance	03


Chapter 2. Installation Guide

2.0	Remove Components	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	HDD Installation	09
2.4	VGA Installation	10
2.5	Air Cooling Installation	11
2.6	AIO Liquid Cooling Installation	12
2.7	I/O Connection	13
2.8	ARGB Control Instruction	14
2.9	Remove Filters	15

Case Type	Micro Case		
Dimension (H*W*D)	438 x 214 x 381.4 mm (17.24 x 8.43 x 15.02 inch)		
Panel	Tempered Glass x 2		
Material	SPCC		
Cooling System	Right (intake): 120 x 120 x 25 mm ARGB Lite Reverse fan (1000rpm, 21.9 dBA) x 2 Rear (exhaust): 120 x 120 x 25 mm ARGB Lite fan (1000rpm, 22.3 dBA) x 1		
Drive Bays	1 x 3.5", 2 x 2.5"		
Expansion Slots	4		
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX)		
I/O Port	USB 3.0 x 2, HD Audio x 1		
PSU	Standard PS2 PSU (optional)		
Fan Support	Top	2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm
	Right	2 x 120 mm, 1 x 120 mm	
	Rear	1 x 120 mm	
	Power Cover	2 x 120 mm, 1 x 120 mm	
Radiator Support	Top	1 x 240 mm, 1 x 120 mm	1 x 280 mm, 1 x 140 mm
	Rear	1 x 120 mm	
Clearances	CPU cooler max height	160 mm	
	VGA max length	340 mm	
	PSU max length	180 mm	


Figure	Parts Name	Q'ty	Used for
	Stand #6-32 x 6mm	6	Power Supply
	Screw M3 x 5mm	18	Motherboard / 2.5" HDD / SSD
	Screw #6-32 x 6mm	8	3.5" HDD
	Stand-off #6-32 x 6.5mm	3	Backup
	Screw #6-32 x 28mm	8	Case Fan
	Clip	2	Backup
	Zip Ties	5	Cable Management

Chassis dimension

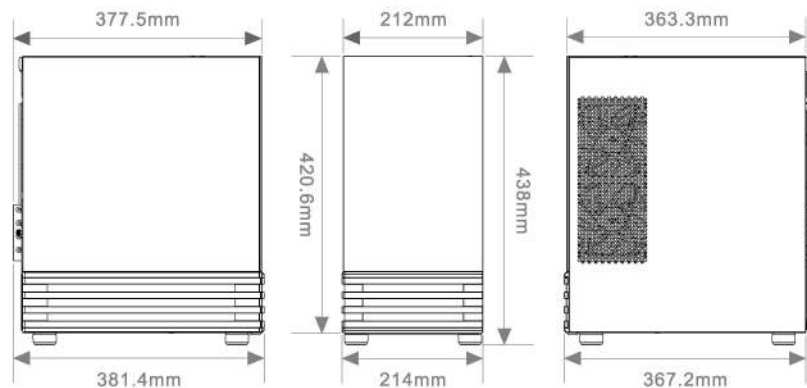


Motherboard Compatibility: ITX / mATX


(Up to 244mm wide)

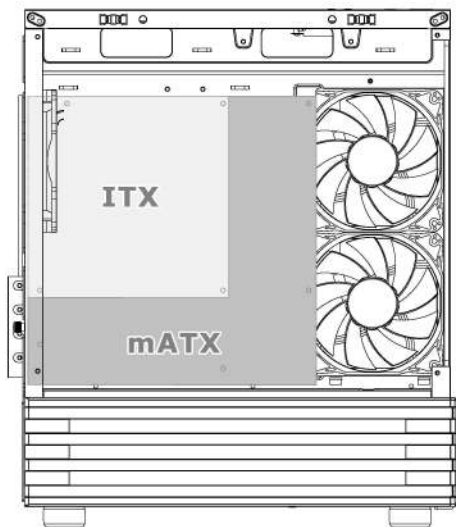



CPU cooler max height: 160mm

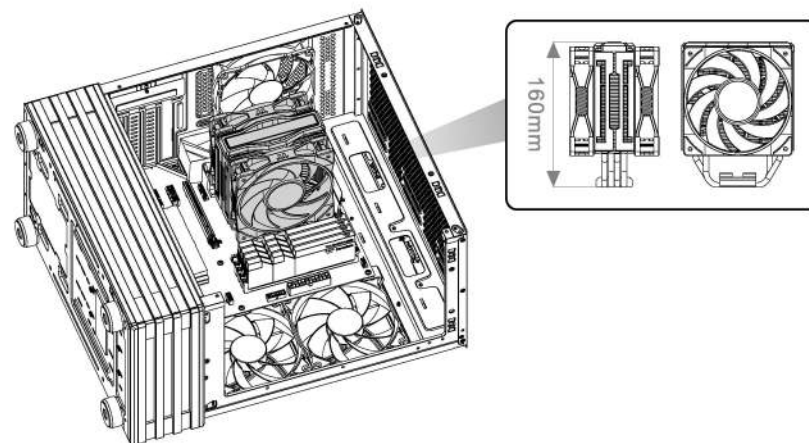

VGA max length: 340mm

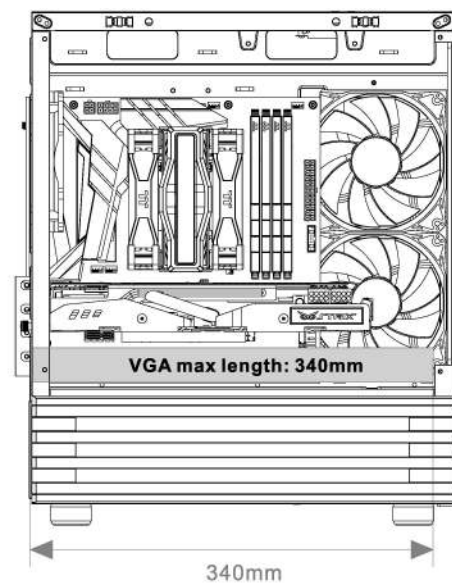


PSU max length: 180mm

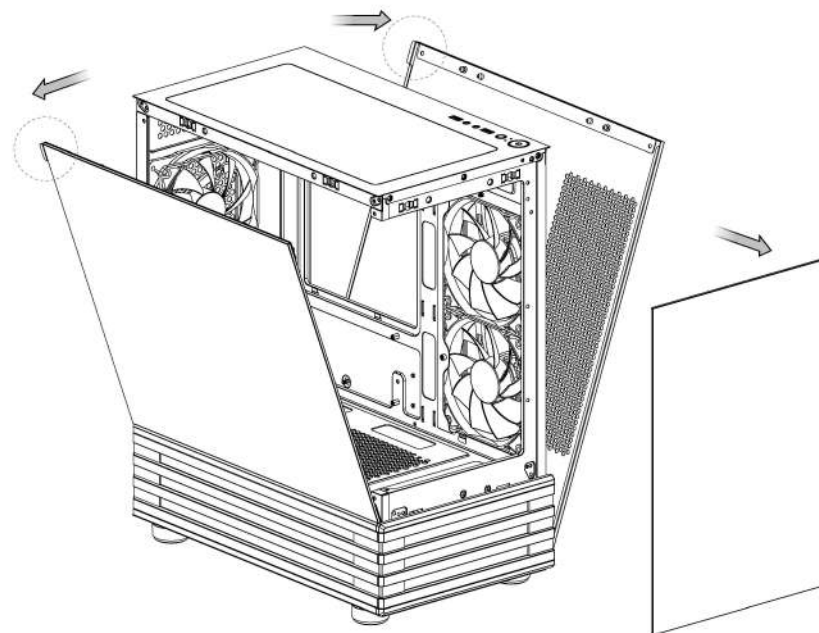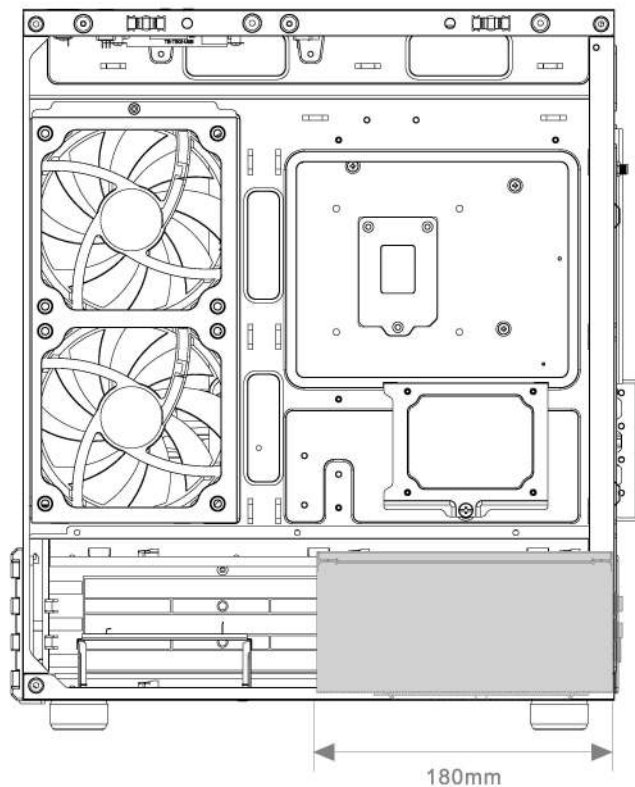









x 4

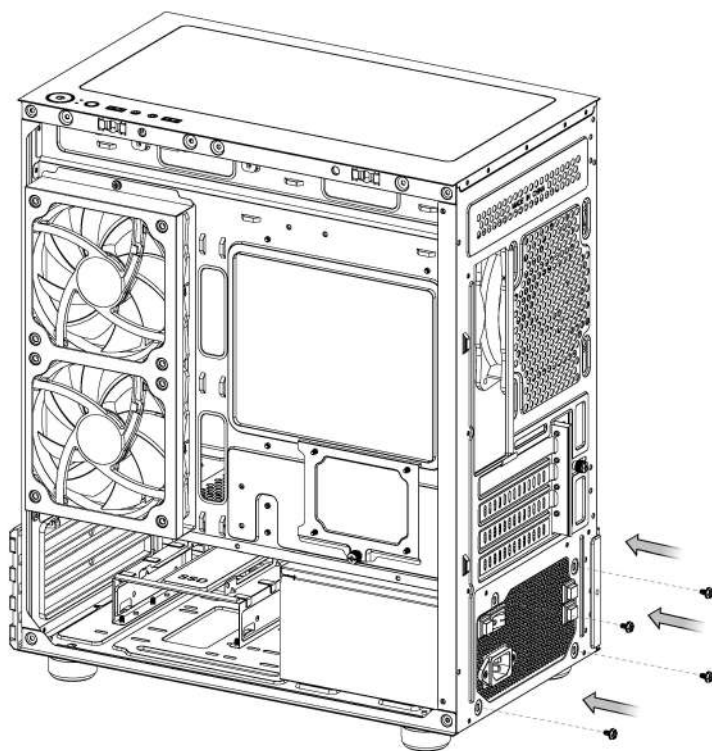


x 8

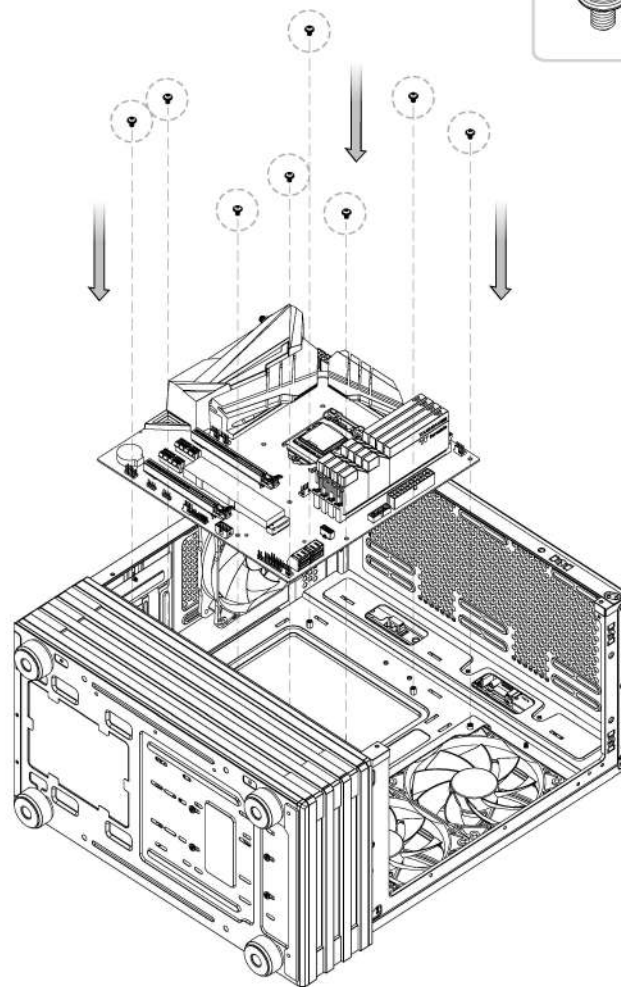

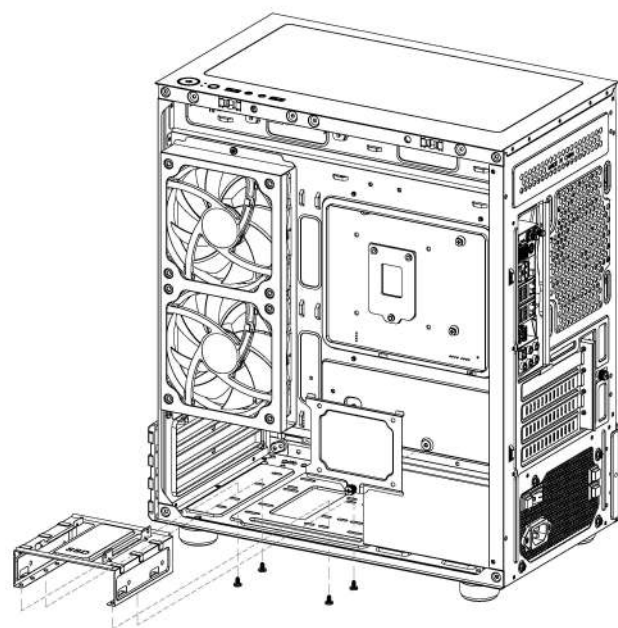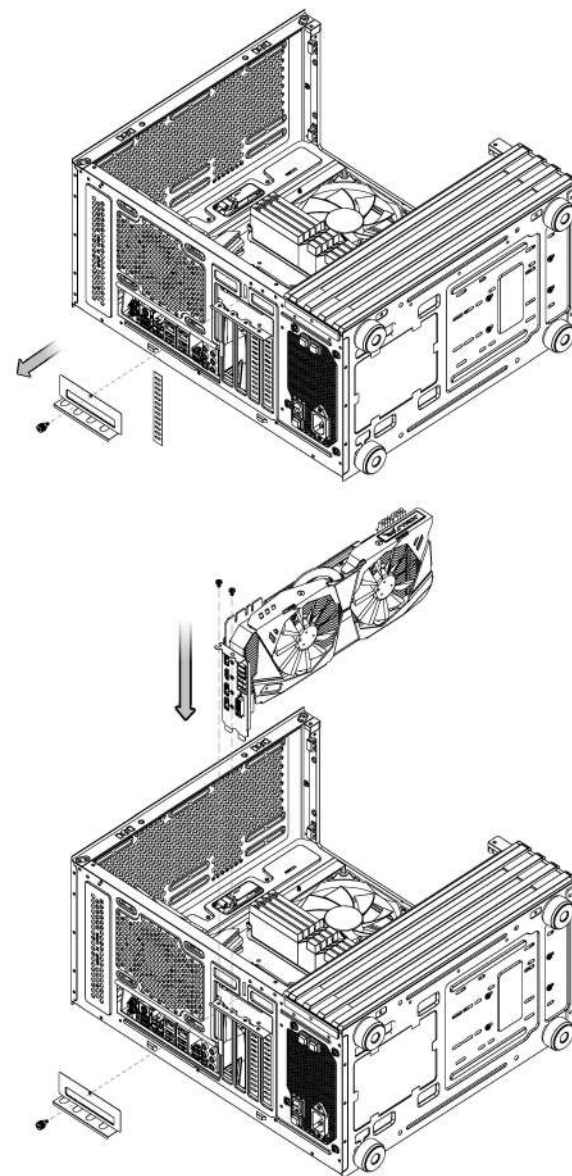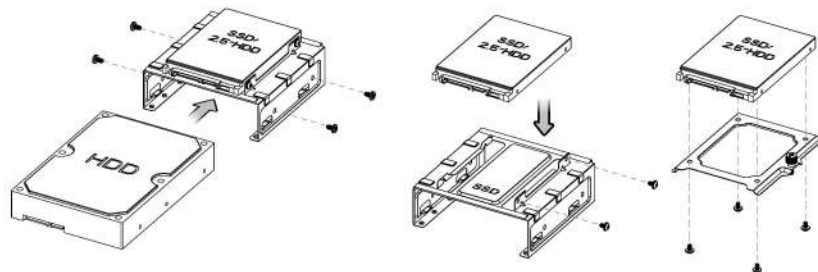
**3.5" HDD****x 4****SSD/2.5" HDD****x 4**

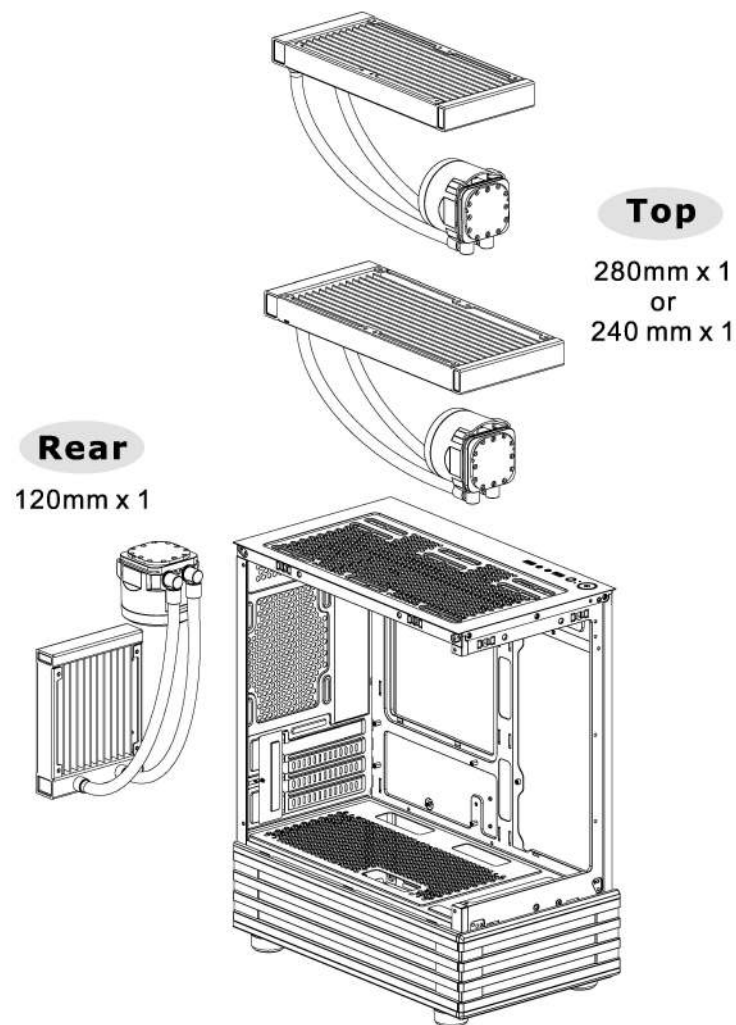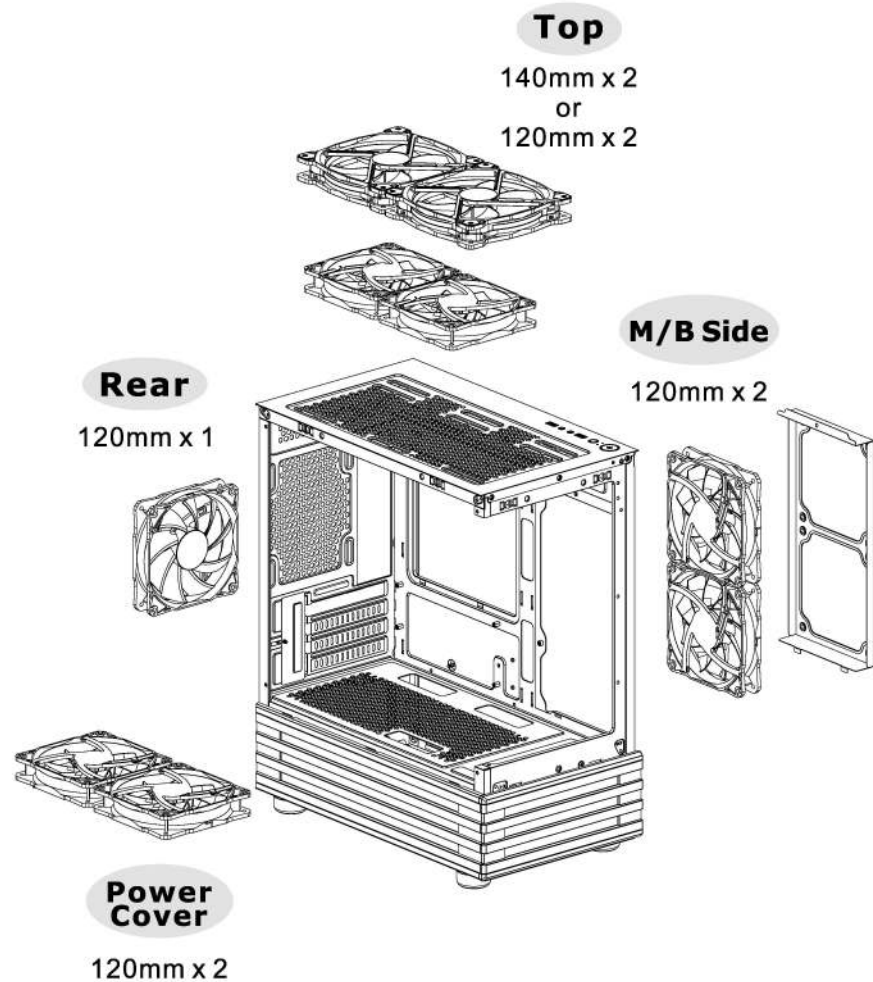

I/O Port

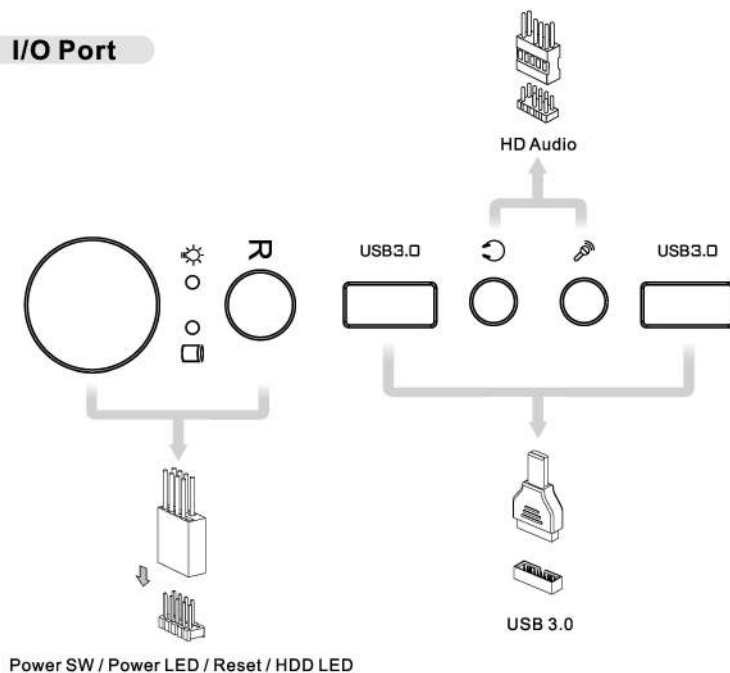

Motherboard Header Diagram

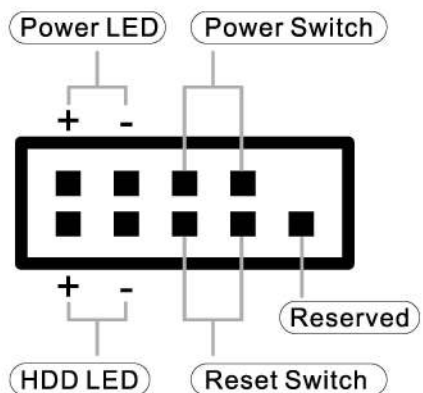

ARGB Control Instruction – How to connect MB

ASUS/ASRock/BIOSTAR

Aura Addressable Strip Header(s)

MSI

JRGB-strip Header(S)

GIGABYTE

AOURS RGB Fusion with Digital LEDs

