


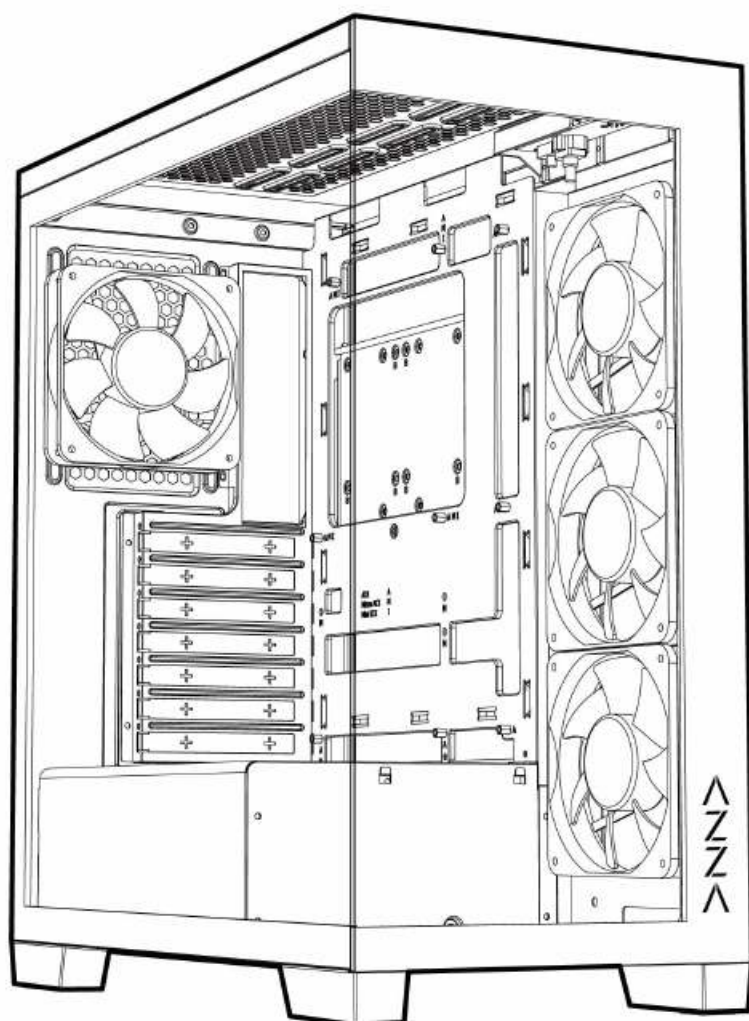

COVE

ATX Mid Tower


USER MANUAL

- 1.Specifications
- 2.Chassis Parts
- 3.Control Panel Functions
- 4.3.5"/2.5" HDD/SSD Installation
5. Remove The Glass Panel
6. Cooling System Installation
7. Fan Installation
8. RGB Lighting Switching

Specifications


Model	
Model Name:	Cove
Model Number:	CSAZ-570
Specifications	
Type:	ATX Mid Tower
Color:	White,Black
Side Panel Window:	Side panel: Tempered Glass
Max CPU Cooler Height:	UP to 170 mm
Max Video Card Length:	Up to 400 mm long video card Wide<155mm
Power Supply:	Not included
Motherboard Compatibility:	ATX(Back-connect supported) 、 Micro ATX 、 ITX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 3
Internal 3.5" Drive Bays:	Up to 1
Expansion Slots:	7
Top Ports:	Power button,LED button, Combo HD Audio, USB2.0 x 1, USB 3.0 x 1,Type C x1
Physical Specifications	
Physical Dimension(HxWxD)	490x230x435mm/19.3.1x9.1x17.1 inches
Weight:	8.0kg / 17.6lbs
Features	
Addressable RGB Light Effects:	ARGB fans are controlled using the LED button.All addressable RGB devices can sync with the motherboard, allowing the motherboard software to control lighting directly.
Available Fan Ports:	3x120mm or 2x140mm fan ports on the top 1x120mm fan port in the rear (1 x 120mm LFO-5512D ARGB fan included) 1x120mm fan port on the bottom 3x120mm fan ports on the MB side (3 x 120mm LFO-5512DR ARGB fan included) 2 x 120 mm fan ports on the PSU shroud
Water Cooling:	Supports radiators up to 360mm on the mb side Supports radiators up to 360/280mm in the Top
Dust Filters:	Removable (magnetic) dustproof net on the top , dust filter on bottom of chassis.
Power Supply Support:	Bottom mounted ATX Power Supply

Chassis Parts

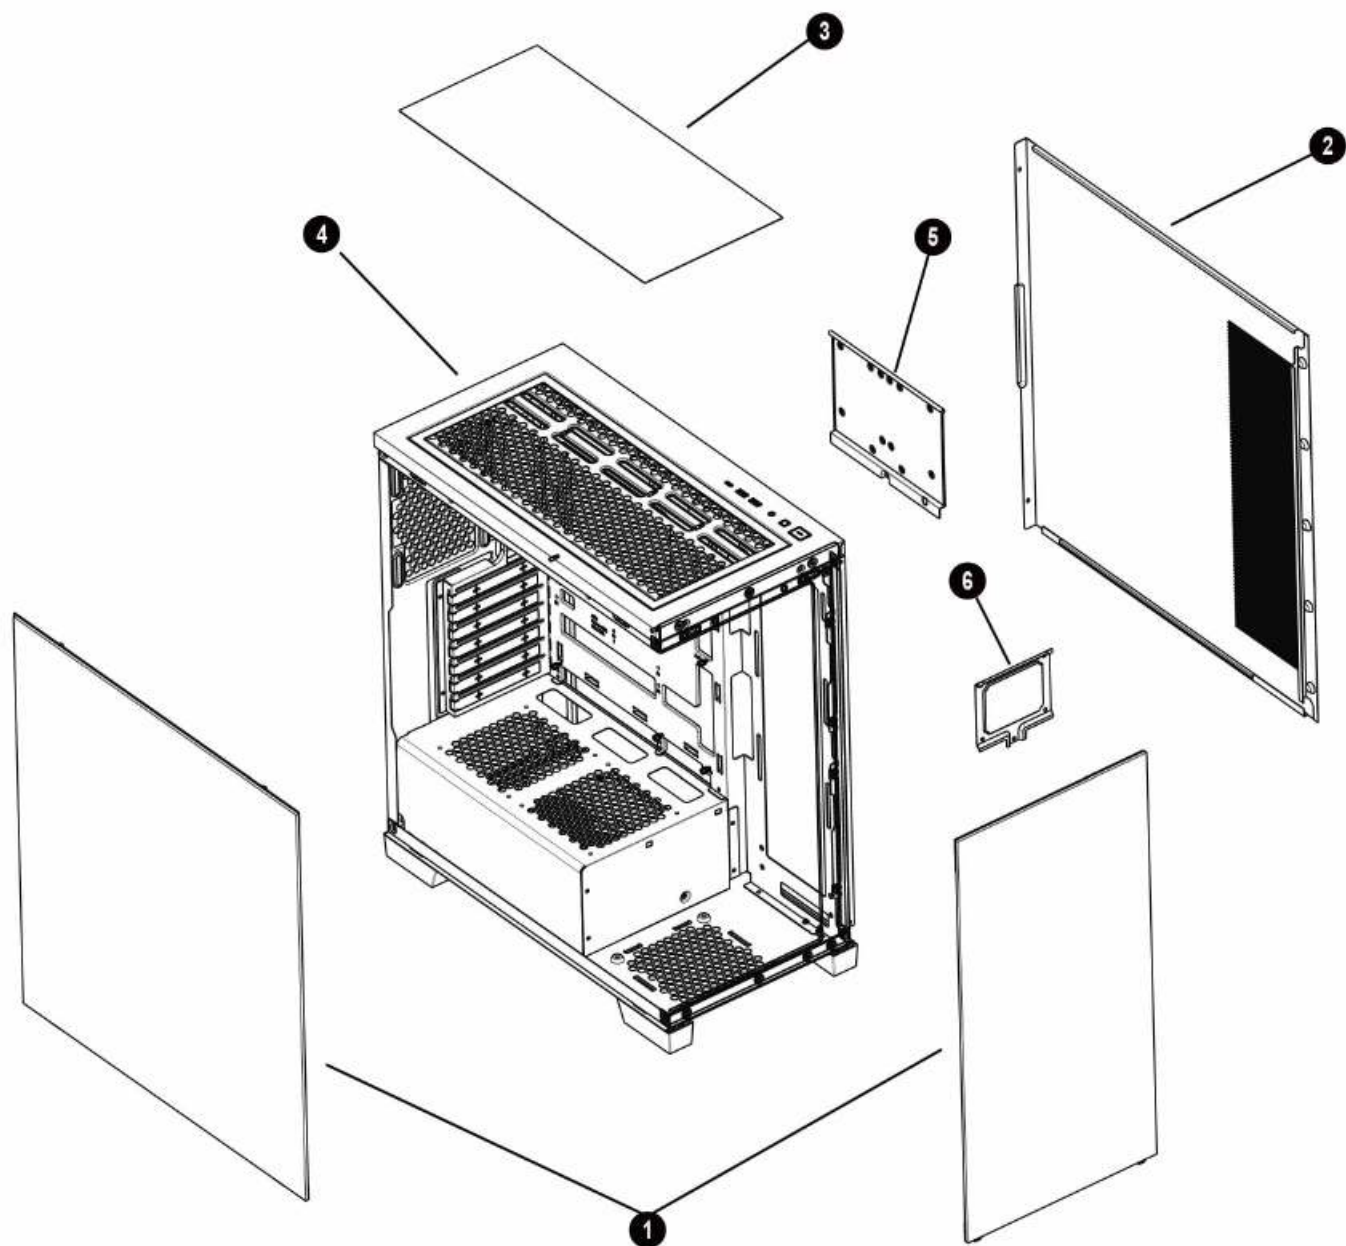


1	Tempered glass panel
2	Metal side panel
3	Removable magnetic mesh
4	Chassis
5	3.5"HDD/ 2.5"SSD metal tray
6	2.5"SSD metal tray

Control Panel Functions

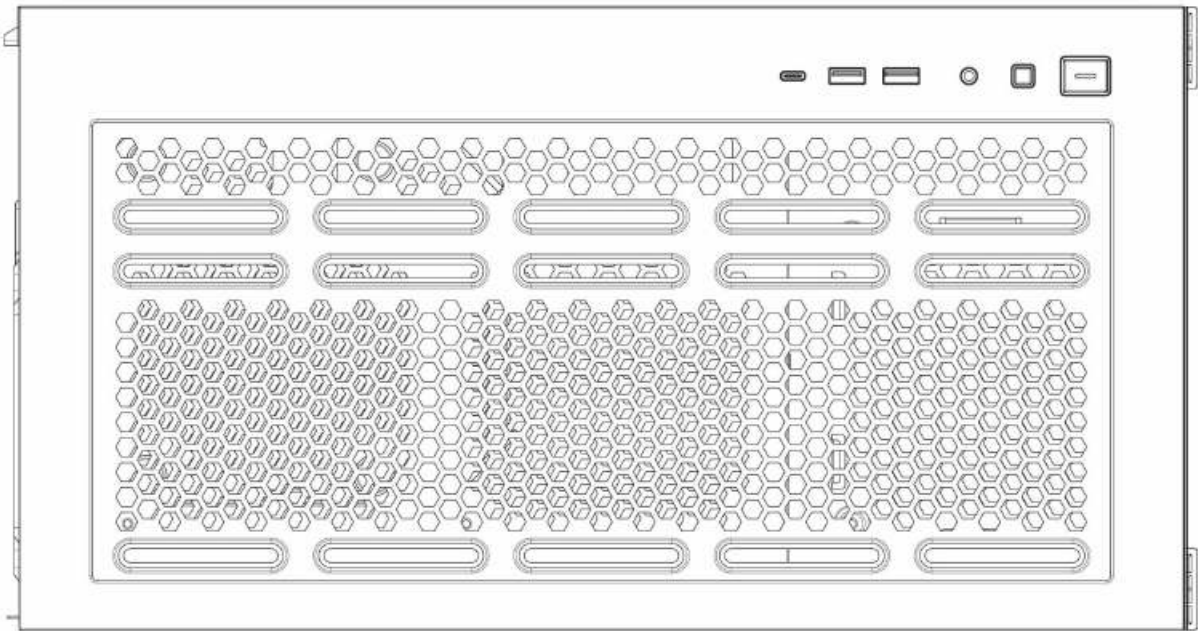


	POWER		USB 2.0
	LED		USB 3.0
	Combo HD Audio		Type C

Remove The Glass Panel

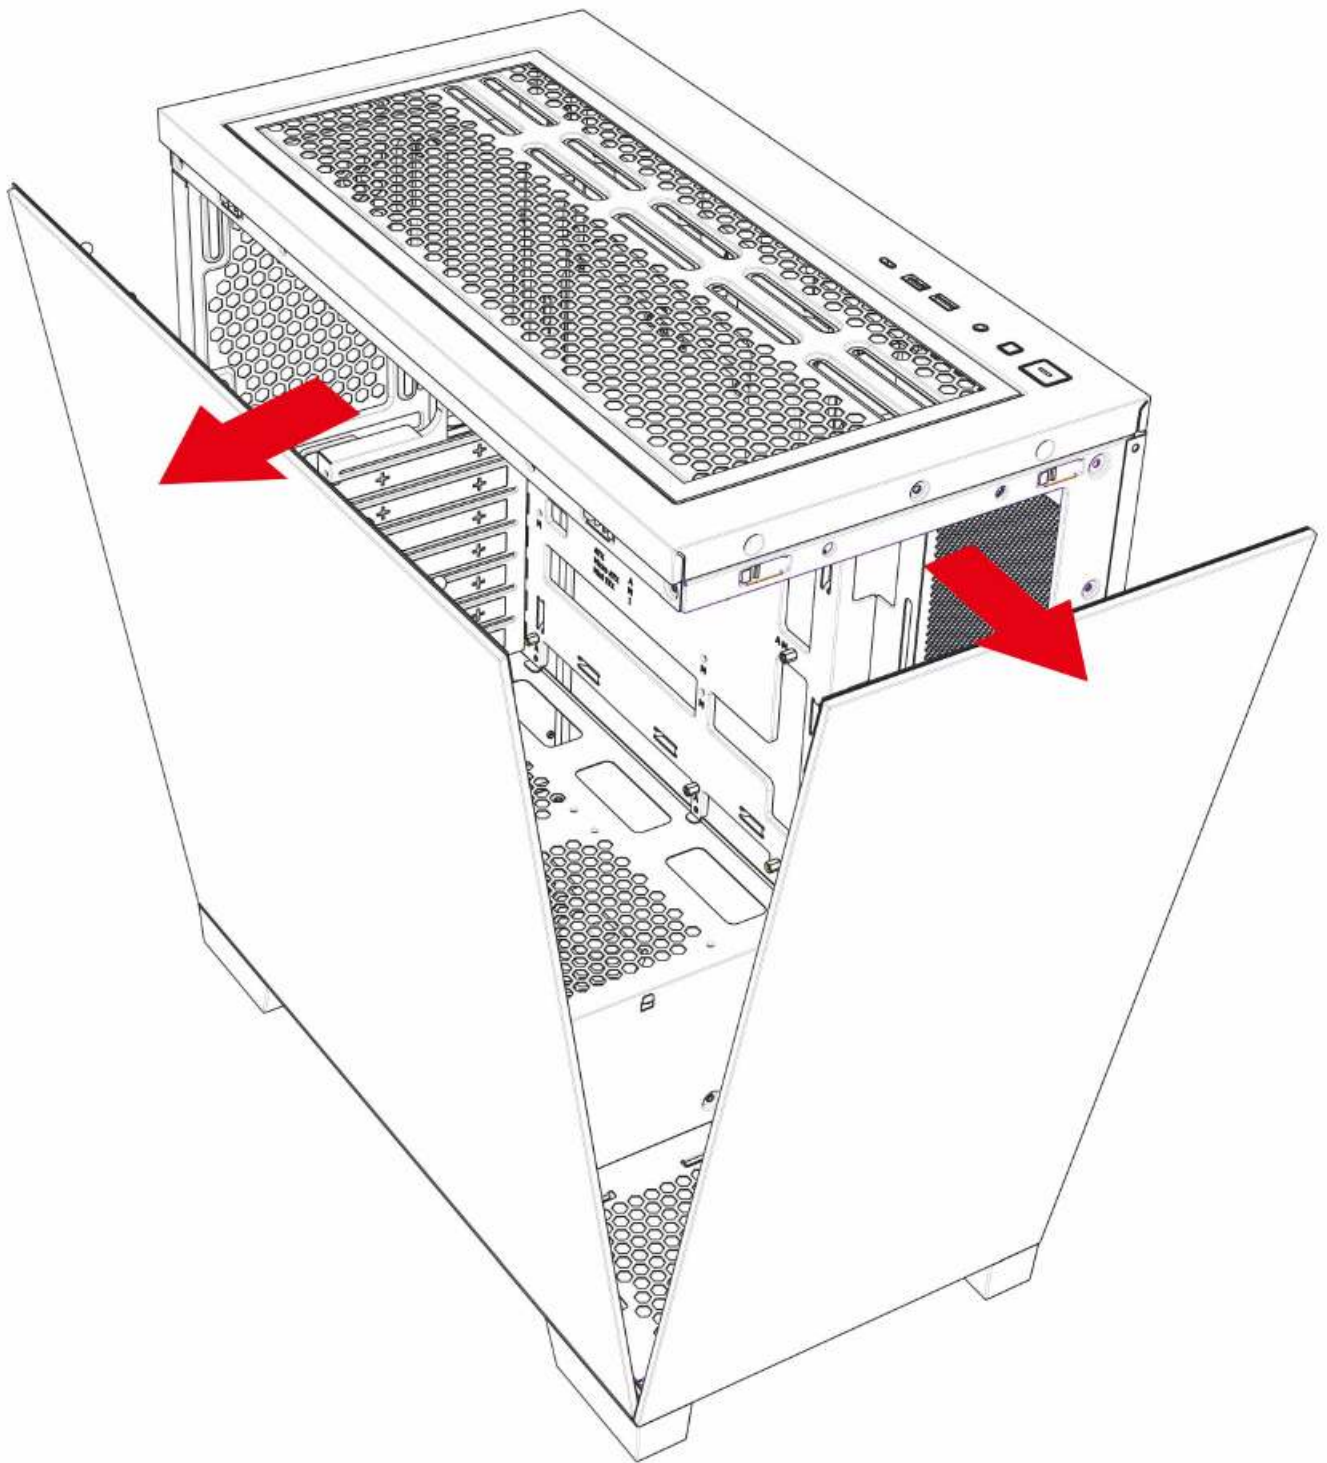


Top




120mm x3

or




140mm x2

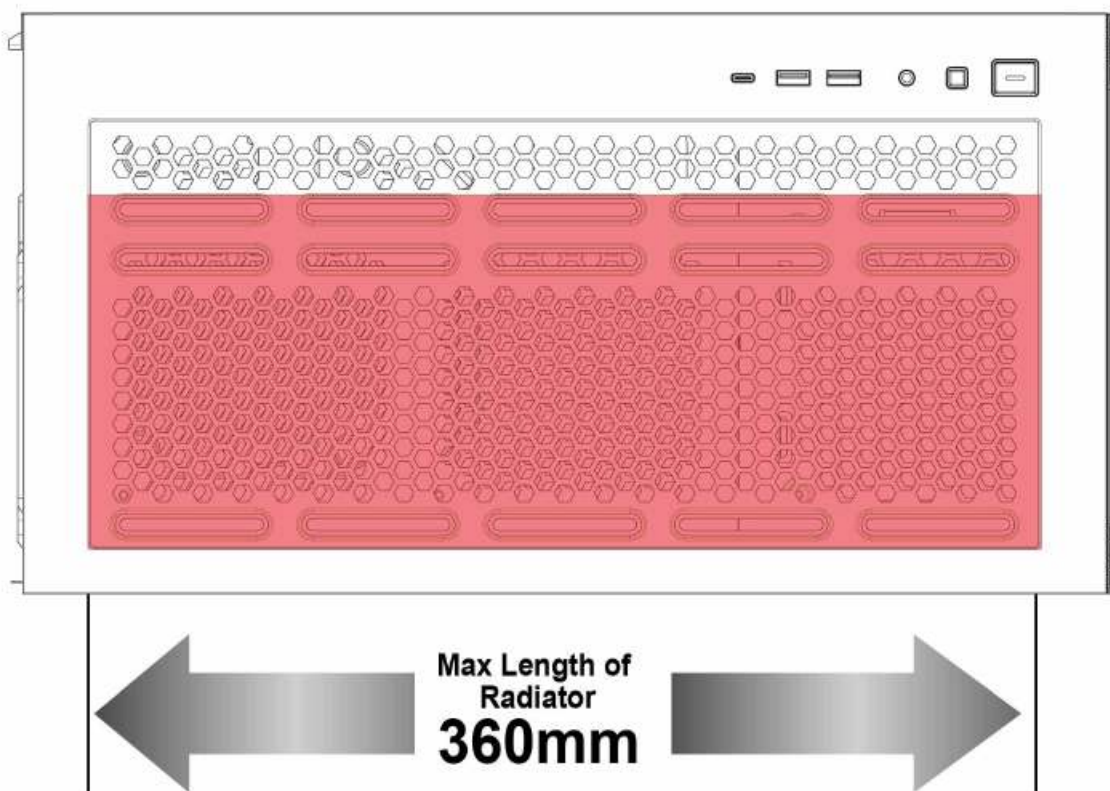


Side

- 3x120mm fan ports on the mb side





120mm x3

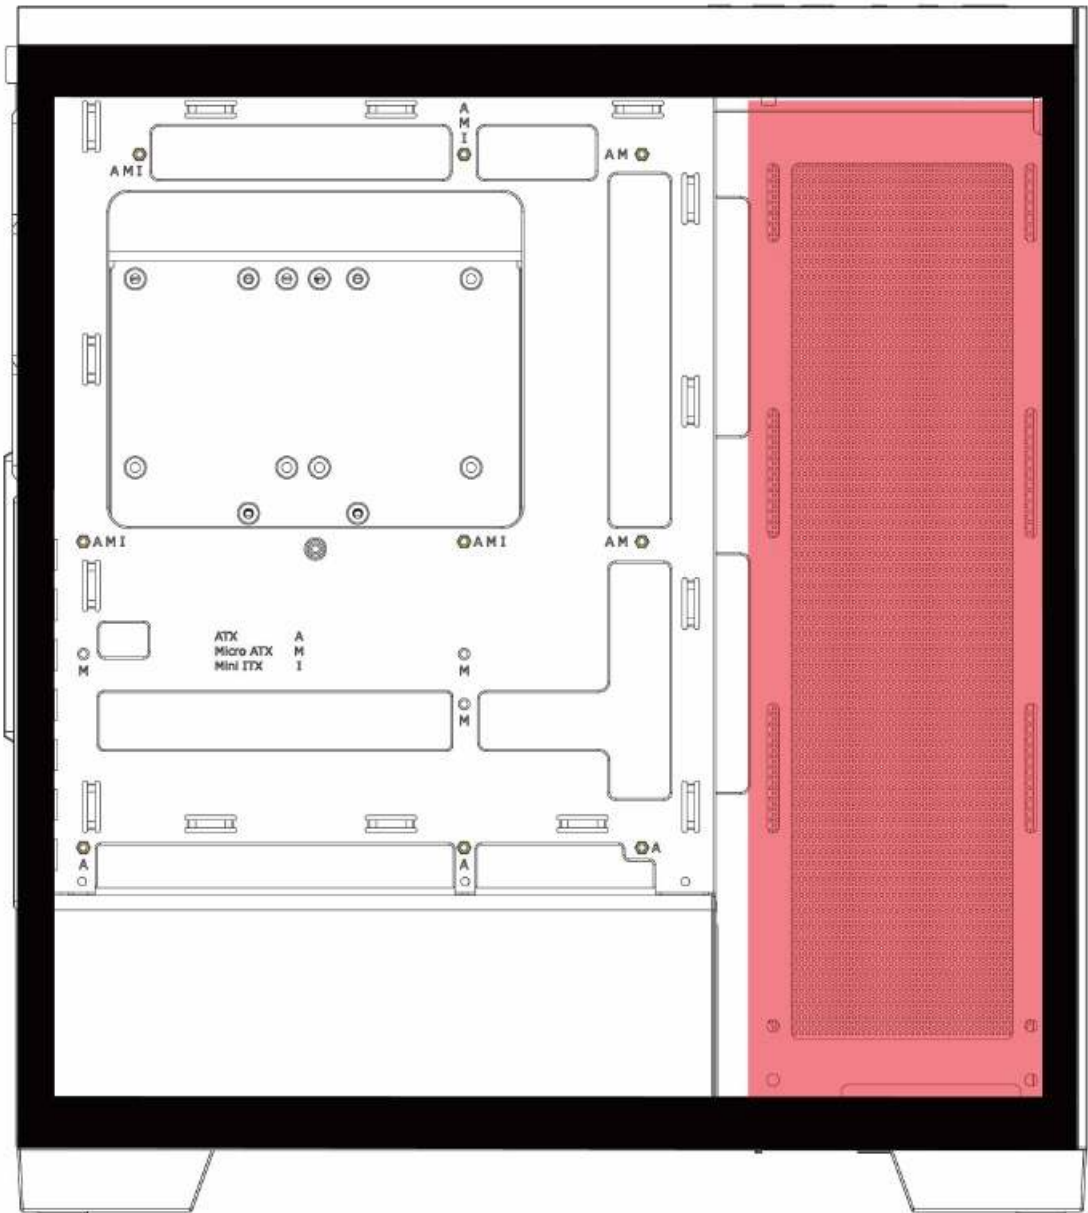


Max Height of Radiator
360mm

Rear

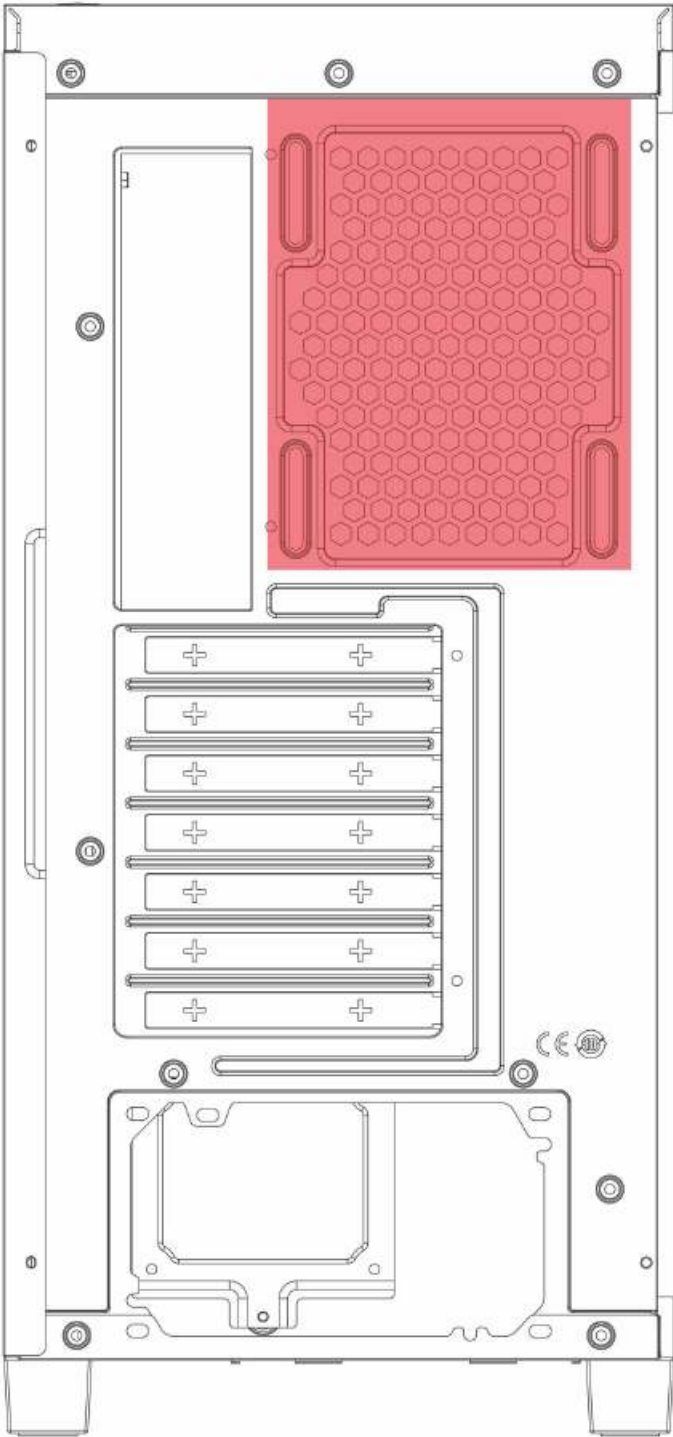

120mm x1


Fan Installation

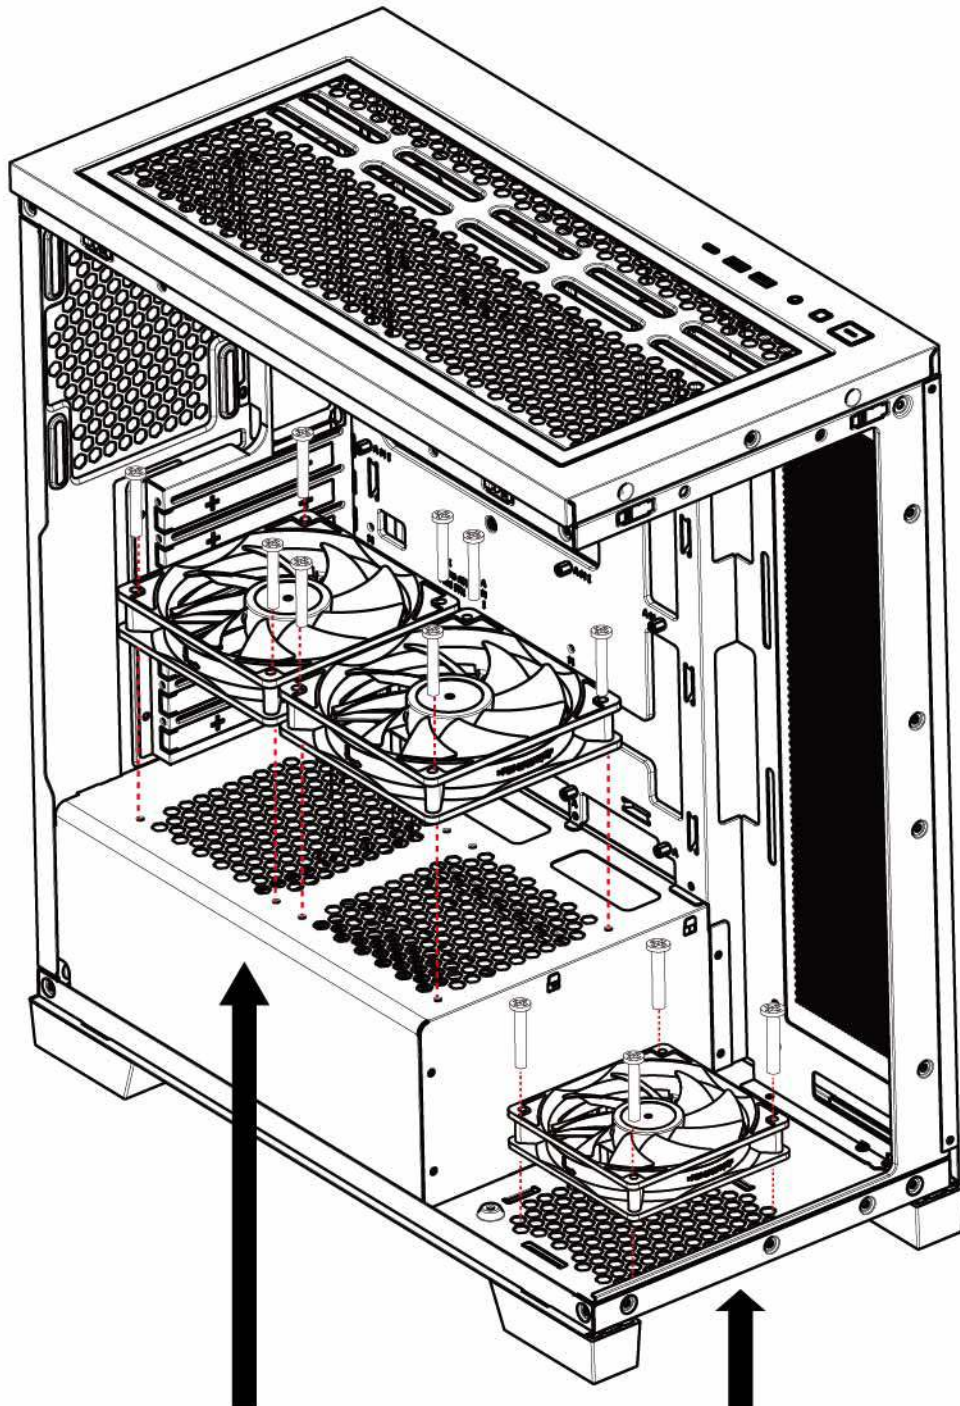



■ 2x120mm fan ports on the Power Supply Shroud

■ 1x120mm fan port on the bottom


Fan Installation



120mm x1




120mm x3

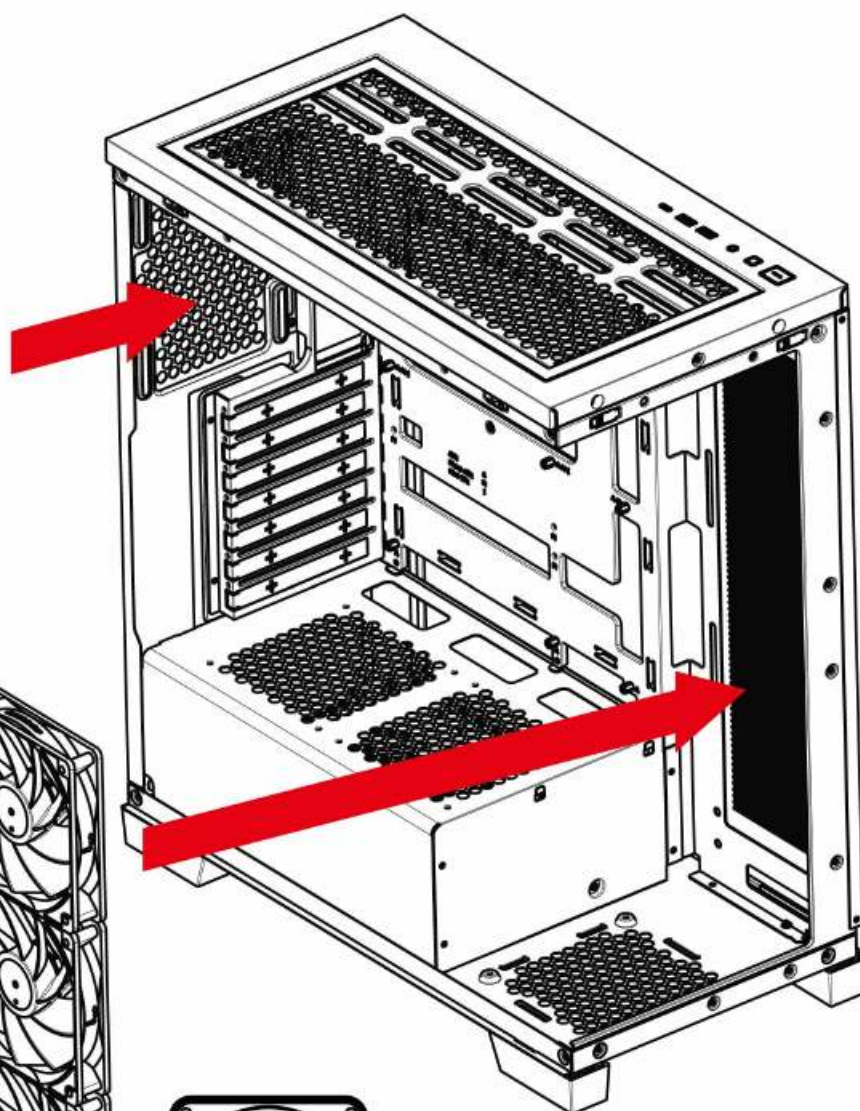

■ 3x120mm fan ports
on the mb side

Fan Installation

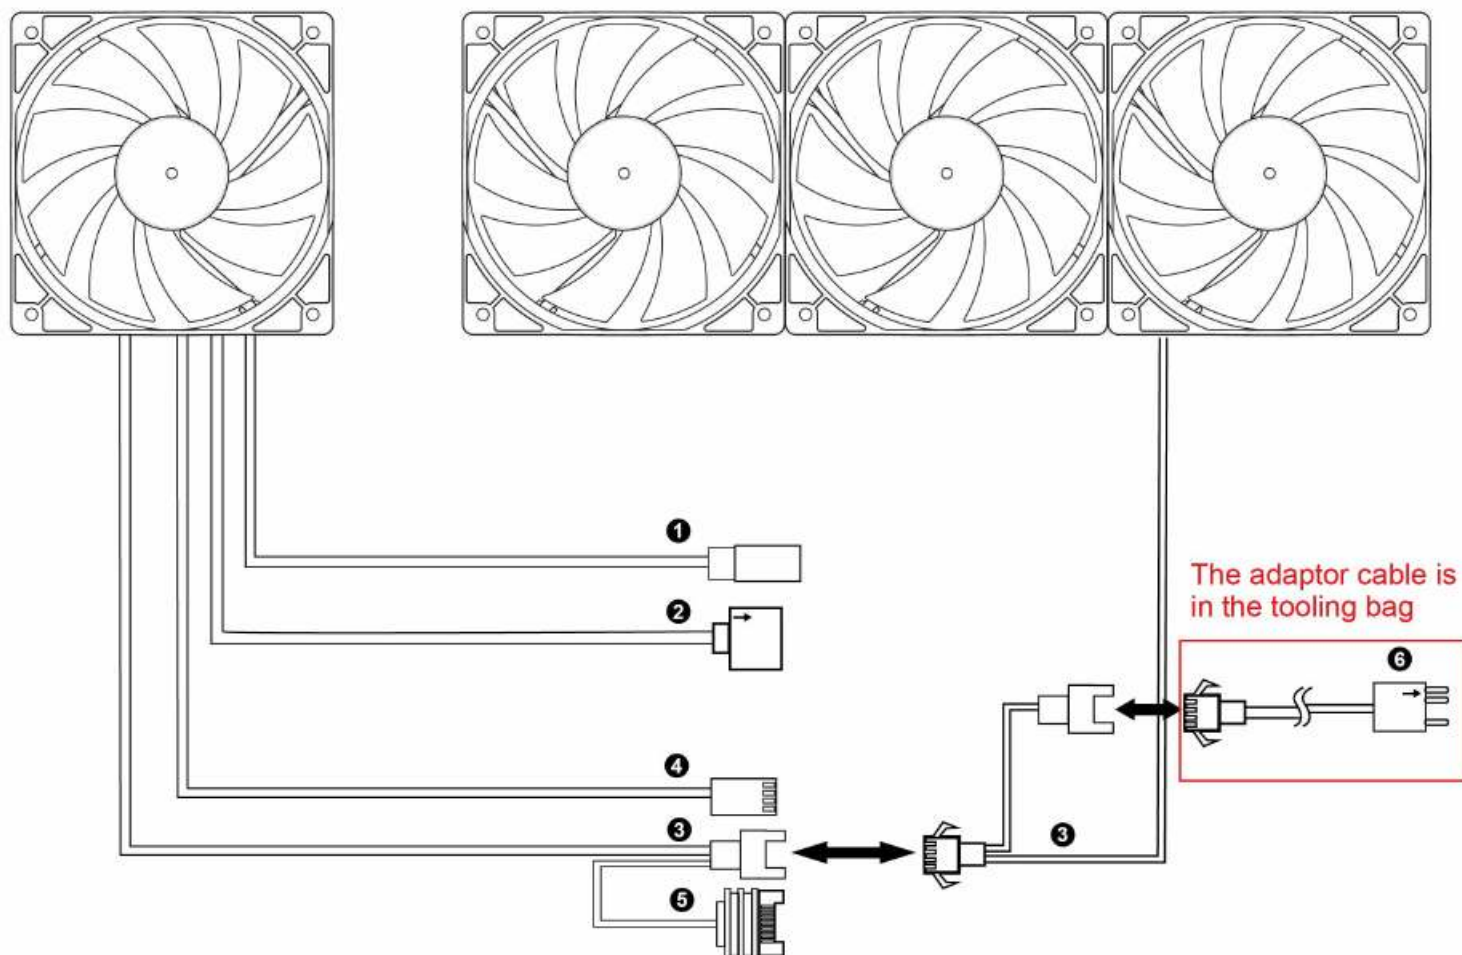

	CONNECTOR	CONNECTION
①	Reset (LED) S/W (2pin)	LED Button
②	ARGB LED 5V (3pin) female connector	The 5V/3pin ARGB socket of the motherboard
③	Fan Connector	The master Fan connect to the sub-fan
④	Fan Connector PWM (4pin)	CHA_FANx socket of the motherboard
⑤	SATA	Power Supply
⑥	ARGB LED 5V (3pin) male connector	Other 5V/3pin ARGB devices

- ※ Before the fan starts, please make sure the PWM connector ④ and SATA connector ⑤ is connected.
- ※ Press the LED button to cycle through different RGB lighting modes, all ARGB devices are controlled by the LED button. (make sure the other 3pin ARGB device is connected with ⑥)
- ※ Ensure ② insert the motherboard, and hold the LED button for 2 seconds to switch the RGB control function to the motherboard RGB sync. software. Press the LED button for 1 second, to switch in sixteen individual RGB LED modes and controlled by the LED button.

RGB Lighting Switching

- Press the LED button to cycle through different RGB lighting modes.

