

## INSERTS



High Efficiency Motor



GCX 53 SD

Cod. 02030308 EAN 8422248103572




- ☐ **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- ☐ 4 extraction levels, 3 + 1 **TURBO**
- ☐ **1st speed silent mode**
- ☐ Extraction power (according to UNE/EN 61591): **750m³/h** - 340m³/h
- ☐ **Sound power (Reg.(EU) n°65/2014): 50dB(A)**, maximum: 65dB(A)
- ☐ BT3 motor. Extra silent. Maximum energy consumption **280W**
- ☐ **High efficiency strip led lighting**
- ☐ Easy-to-install system
- ☐ Dishwasher-washable filters
- ☐ Stainless steel finishing and grey glass
- ☐ Max. Pressure: 470 Pa
- ☐ 150/125 mm outlet diameter
- ☐ **Energy Class: A**

## ► Accessories (not included)

Active charcoal filter .....Cod. 02859398 / EAN 8422248075497.....

Check valve .....Cod. 02832004 / EAN 8422248480499 .....

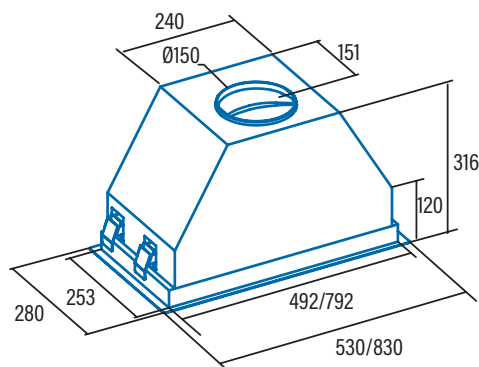

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| <b>Code</b>                                                                             | <b>02030308</b>      |
| <b>EAN</b>                                                                              | <b>8422248103572</b> |
| <b>Model</b>                                                                            | <b>GCX 53 SD</b>     |
| <b>Type</b>                                                                             | Canopy               |
| <b>Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564</b> |                      |
| AEC (Annual Energy consumption) (kWh/annum)                                             | 56,1                 |
| EEL class (Energy Efficiency Class)                                                     | A                    |
| FDE (Fluid Dynamic Efficiency)                                                          | 30,2                 |
| FDE class (Fluid Dynamic Efficiency Class)                                              | A                    |
| LE (Lighting Efficiency) (lux/W)                                                        | 26                   |
| LE class (Lighting Efficiency Class)                                                    | B                    |
| GFE (Grease Filtering Efficiency)                                                       | 91,2                 |
| GFE Class (Grease Filtering Efficiency class)                                           | B                    |
| Air flow at minimum speed (m3/h)                                                        | 340                  |
| Air flow at maximum speed (m3/h)                                                        | 600                  |
| Air flow at intensive speed (TURBO) (m3/h)                                              | 750                  |
| Sound Power Level at minimum speed (dB)                                                 | 50                   |
| Sound Power Level at maximum speed (dB)                                                 | 65                   |
| Sound Power Level at intensive speed (TURBO) (dB)                                       | 67                   |
| Po (Power Consumption in off mode) (W)                                                  | 0,3                  |
| Ps (Power Consumption in standby) (W)                                                   | 0                    |
| <b>Integration directive EU 66/2014</b>                                                 |                      |
| f (Time Increase Factor)                                                                | 0,9                  |
| EEL (Energy Efficiency Index)                                                           | 54,4                 |
| QBEP (Flow Rate at Best Efficiency Point) (m3/h)                                        | 429,4                |
| PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)                         | 405                  |
| WBEP (Electric Power Input at Best Efficiency Point) (W)                                | 159,8                |
| WL (Nominal Power Consumption of Lighting system) (W)                                   | 7                    |
| EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)              | 170                  |
| <b>External Dimensions</b>                                                              |                      |
| Width (mm)                                                                              | 530                  |
| Depth (mm)                                                                              | 280Z                 |
| Total max height(mm)                                                                    | 316                  |
| Total min height(mm)                                                                    | 316                  |
| Outlet Diameter (mm)                                                                    | 150/125              |
| <b>Characteristics</b>                                                                  |                      |
| Motor                                                                                   | BT3                  |
| Extraction Levels                                                                       | 3+1                  |
| Motor Maximum Power Consumption                                                         | 280                  |
| Maximum Pressure                                                                        | 450                  |
| Intensive Speed (TURBO) Pressure                                                        | 470                  |
| Control Type                                                                            | TC4i                 |
| Automatic shut-down timer                                                               | √                    |
| Electronic Filter Saturation Indicator                                                  | √                    |
| Filter Type                                                                             | Metallic             |
| Anti-grease Filter Number                                                               | 2                    |
| Inner Shield                                                                            | -                    |
| <b>Lighting</b>                                                                         |                      |
| Light Type                                                                              | SSLED                |
| Adjustable Intensity Lighting                                                           | √                    |
| N° of Lamps                                                                             | 1                    |
| <b>Installation</b>                                                                     |                      |
| Minimum height distance to a electric worktop hob (mm)                                  | 550                  |
| Minimum height distance to a gas worktop hob (mm)                                       | 650                  |
| Installation with Outlet tube to the exterior / Recirculating                           | BOTH                 |
| Easy Installation System                                                                | √                    |
| <b>Electric Connection</b>                                                              |                      |
| Total Rush Power (W)                                                                    | 285                  |
| Rated Voltage (V)                                                                       | 220-240              |
| Network Frequency (Hz)                                                                  | 50                   |
| Electrical Insulation Class                                                             | CLASS II             |
| Plug                                                                                    | EU - 2 pins          |
| <b>Accessories</b>                                                                      |                      |
| Upper Decorative tube Extension                                                         | -                    |
| White Decorative Tube                                                                   | -                    |
| Black Decorative Tube                                                                   | -                    |
| Island Tube Enhancer                                                                    | -                    |
| Check Valve                                                                             | 02832004             |
| MAX PRO Metal Filter                                                                    |                      |
| Metal Filter                                                                            | 65300310             |
| DUAL Filter (metal + active charcoal)                                                   |                      |
| Active Charcoal Filter                                                                  | 02859392             |
| Noiseless Flexible Duct                                                                 | 02893002             |