



High Efficiency Motor

GT-PLUS 45 X

Cod. 02030309 EAN 8422248190374




• Mechanical Control Panel

- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: **1200m³/h**
- **Sound power (Reg.(EU) n°65/2014): 50dB(A)**, maximum: 65dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency compact Strip LED lighting**
- Easy-to-install system
- Dishwasher-washable filters
- Finished in Stainless steel
- Max. Pressure: 400 Pa
- 150/125 mm Outlet diameter
- Energy Class: C

Accessories (not included)

Active charcoal filter
Check valve

Cod. 02859398 / EAN 8422248075497
Cod. 02832004 / EAN 8422248480499

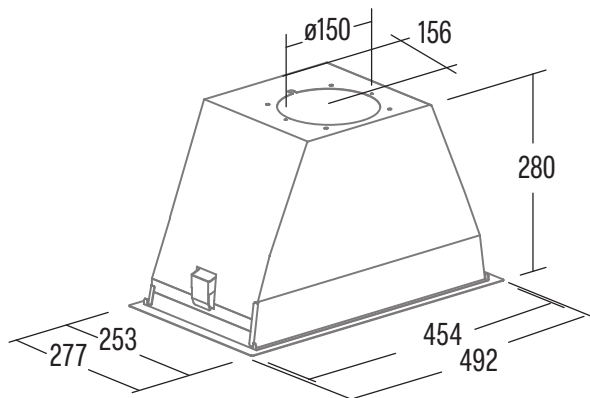

Code	02030309
EAN	8422248190374
Model	GT-PLUS 45 X /M
Type	Canopy
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	88,6
EEL class (Energy Efficiency Class)	C
FDE (Fluid Dynamic Efficiency)	16,3
FDE class (Fluid Dynamic Efficiency Class)	D
LE (Lighting Efficiency) (lux/W)	33,7
LE class (Lighting Efficiency Class)	A
GFE (Grease Filtering Efficiency)	91,2
GFE Class (Grease Filtering Efficiency class)	B
Air flow at minimum speed (m³/h)	300
Air flow at maximum speed (m³/h)	645
Air flow at intensive speed (TURBO) (m³/h)	-
Sound Power Level at minimum speed (dB)	50
Sound Power Level at maximum speed (dB)	65
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	1,4
EEL (Energy Efficiency Index)	81,1
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	358,1
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	270
WBEP (Electric Power Input at Best Efficiency Point) (W)	164,9
WL (Nominal Power Consumption of Lighting system) (W)	6
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	202
External Dimensions	
Width (mm)	492
Depth (mm)	277
Total max height(mm)	282
Total min height(mm)	282
Outlet Diameter (mm)	150/125
Characteristics	
Motor	BT2
Extraction Levels	3
Motor Maximum Power Consumption	200
Maximum Pressure	400
Intensive Speed (TURBO) Pressure	-
Control Type	Mechanic
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metallic
Anti-grease Filter Number	2
Inner Shield	-
Lighting	
Light Type	CSLED
Adjustable Intensity Lighting	-
Nº of Lamps	2
Installation	
Minimum height distance to a electric worktop hob (mm)	550
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	√
Electric Connection	
Total Rush Power (W)	206
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS II
Plug	EU - 2 pins
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	02832004
MAX PRO Metal Filter	-
Metal Filter	02811000*
DUAL Filter (metal + active charcoal)	02811003
Active Charcoal Filter	02859398
Noiseless Flexible Duct	02893002