


CCC-FC-400X

【operating manual】

A Package details


 x14	 x8	 x8
 x2	 x3	
Main board screw	The power screw	HDD screws
Hard disk slidaway screws	Copper pillar	

B Schematic diagram of wire interface

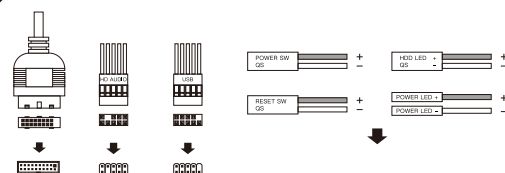


Please refer to the manual that came with your motherboard for any specific connection instructions


C Product size




D IO panel introduction

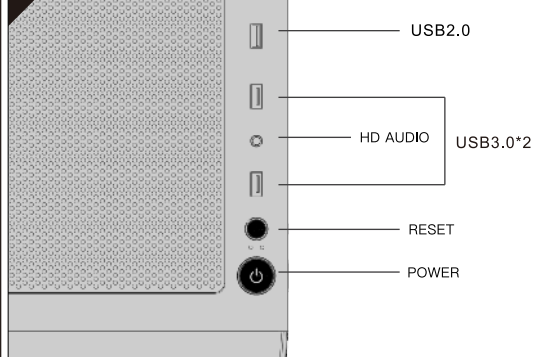


E Machine overview

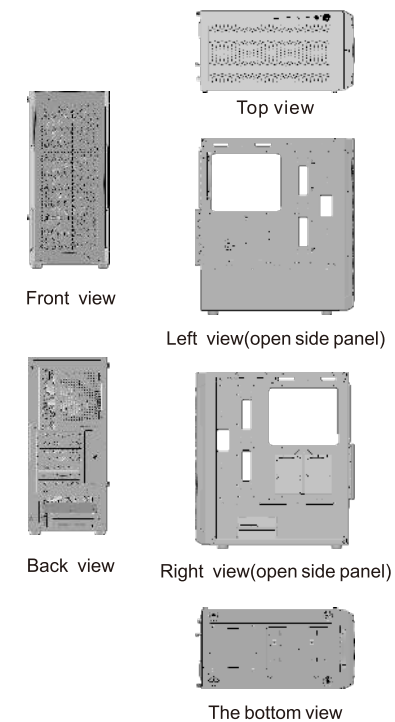

F Chassis disassembly diagram

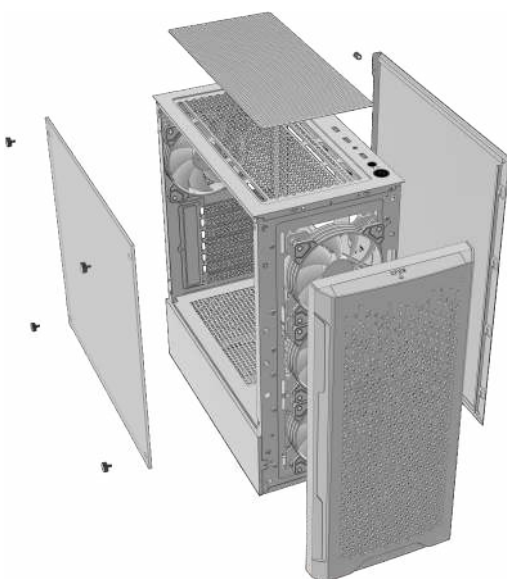


G Remove and install glass side panels

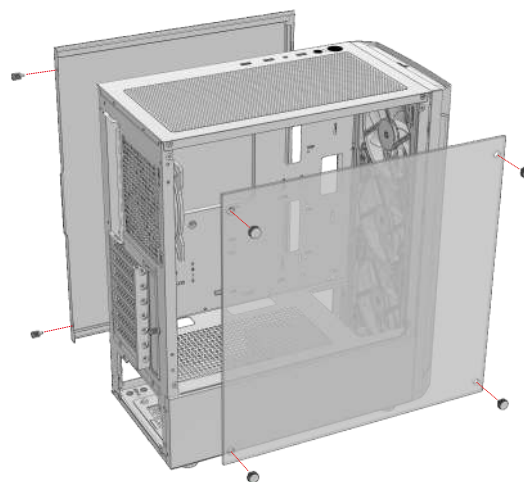

Glass side panel installation: fix the glass side panel with 4 screws (as shown above)


Metal side plate installation: buckle the side plate and fix it with two screws

H The power supply installation

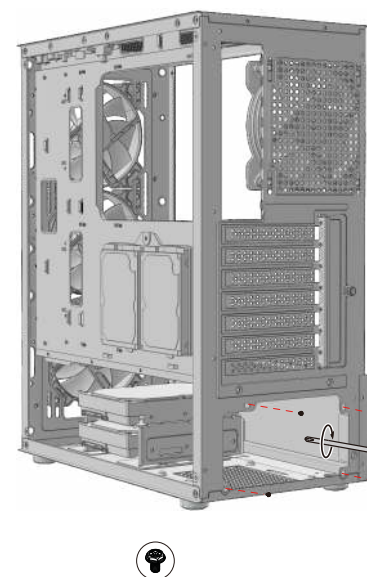


The power supply can be fixed by aligning the screw in the figure to the hole position
Note: different types of power supply, hole location may be slightly different, take the actual object as the standard.

I Motherboard installation

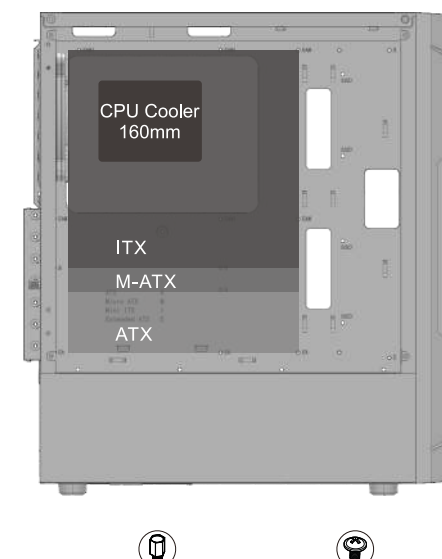


According to the motherboard type (ATX/M-ATX/ITX), the copper pillars may need to be re-arranged manually according to the fixing locations specific to your motherboard
CPU Height limit: 160mm

J The graphics card installation

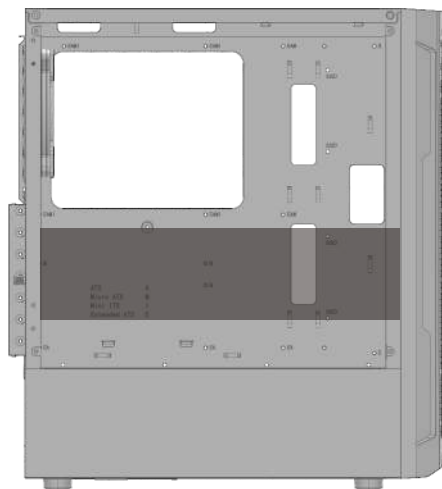


VGA Length: No fan can be installed 345mm,
installed fan 315mm

K Panel disassembly

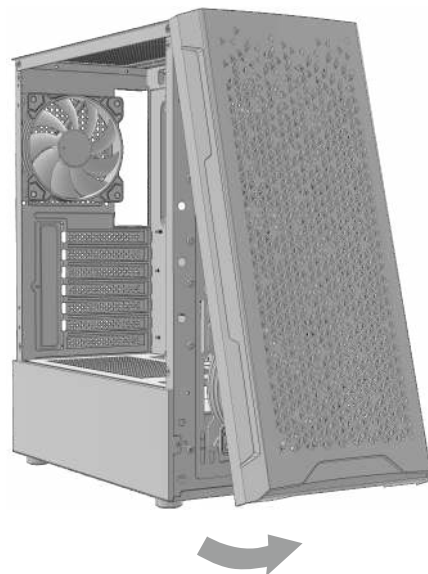


To remove the front panel of the case, pull it by hand,
firmly from the bottom of the panel

L Fan installation

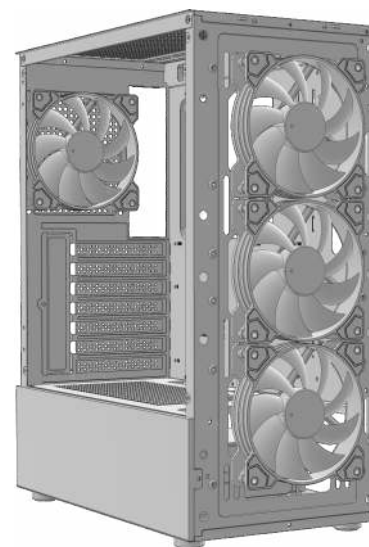


Fans Support: Front: 120mm*3 (Included)
Top: 120mm*2/140mm*2 (Optional)
Rear: 120mm*1 (Included)
PSU Cover: 120mm*2(Optional)

M Water cooling installation

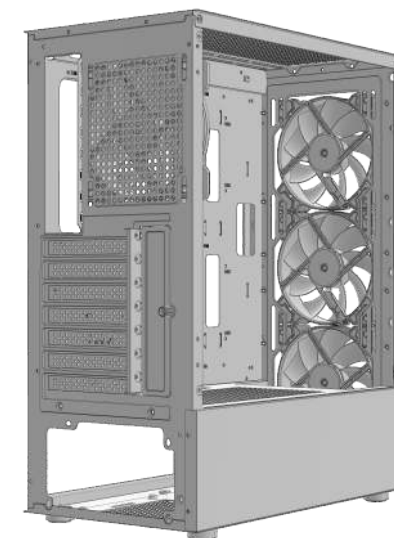

Radiator Support: Front: 120/140/240/360mm
Rear: 120mm


N SSD installation

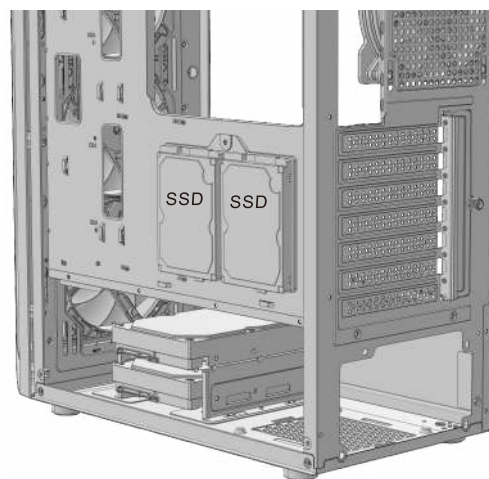

2*SSD

First fix the hole position with the hard disk cushioning pad,
then fix it with SSD screws .


O HDD installation

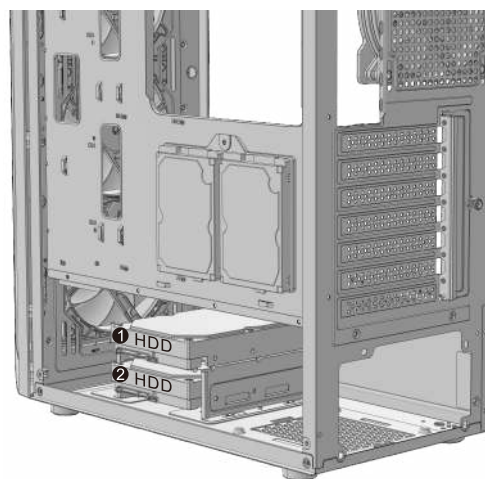


2*HDD

- 1 Remove the hard disk rack and secure the hard disk with screws.
- 2 Lock the two slide rail screws on the left side of the HDD,
slide them into the hard disk rack, and secure the right
side of the hard disk with screws.

P Dust Cover disassembly

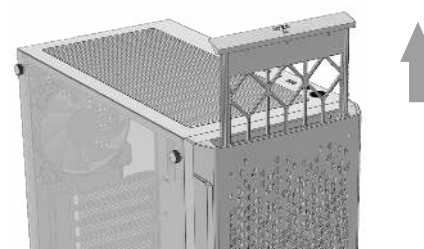


Pull out the air filter from the front panel upward

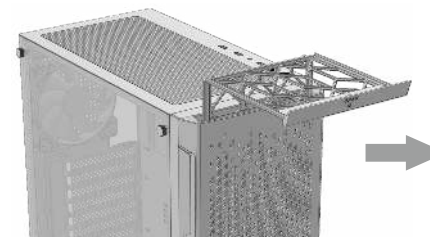


It can be folded 90°

Q Fan interface

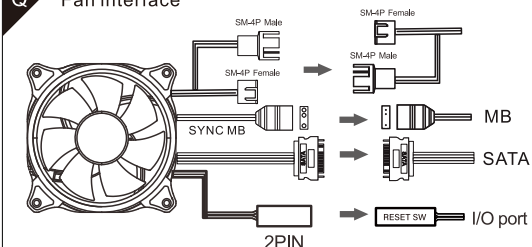

Main Fan*1



Auxiliary Fans*3

The auxiliary fan is connected in series and
finally connected to the male head of the main fan.

*** Change LED lights via Reset button
from Case and Motherboard**