


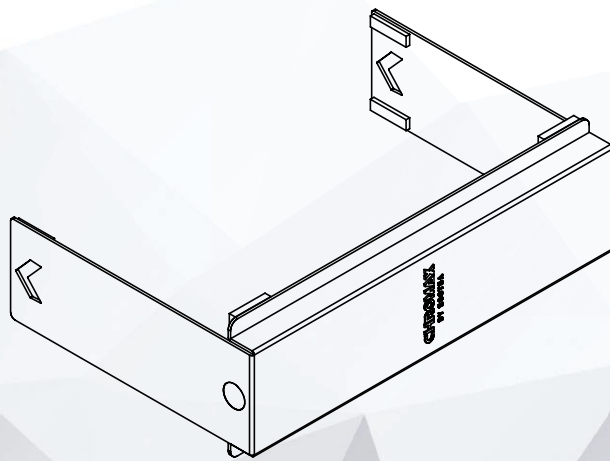

NOCTUA NA-HC4 chromax.black

INSTALLATION MANUAL

This document includes some instructions for installing your NA-HC4 chromax.black heatsink cover.

Should you have any further questions, our support team (support@noctua.at) will be glad to assist you at any time.


Please also have a look at the regularly updated FAQs on our website: <http://www.noctua.at/faqs>

This document is also available in other languages at the following URL: <http://www.noctua.at/manuals>



Scan this code to display multi-lingual manuals on your mobile phone.


INCLUDED PARTS



NA-HCF2 fixture



NA-HCC1 steel clip

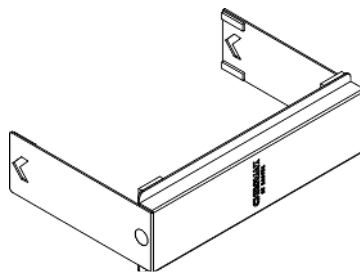


NA-HC4 cover

! Caution



The covers increase the height of the heatsink by 5mm (from 160 to 165mm) and the width by 3mm (from 150mm to 153mm). Please make sure that your case offers sufficient clearance and that the covers don't make contact with any other components such as PCIe cards!

! If your CPU cooler is not yet installed, please first install the heatsink and attach the fan(s) to the heatsink as described in the cooler manual.

1 Put the fixtures on top of the heatsink's two fin-stacks.

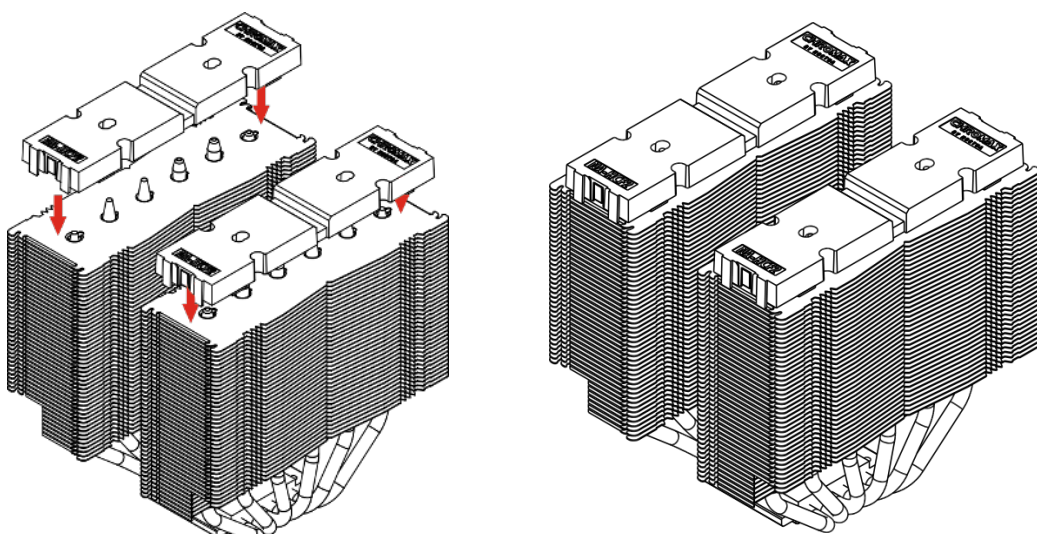


2 Attach the fixture to the heatsink using the steel clip.

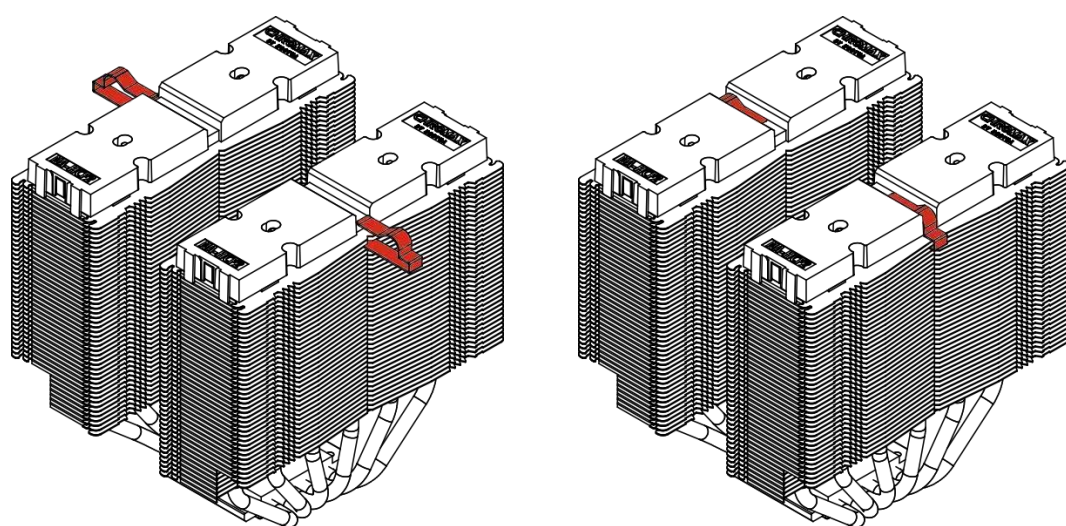

Note that the steel clip must go underneath the second fin from the top.

3 Slide the covers over the fin-stacks until the magnets snap into place. Verify that the covers are sitting firmly on the cooler.

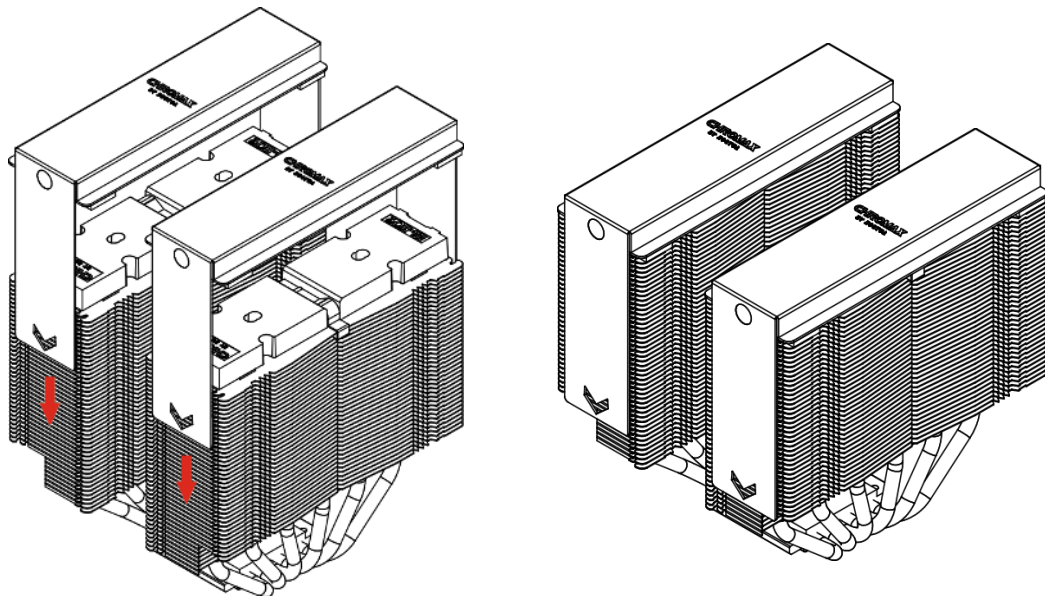

! Warranty and Support

Even with high-grade products and strict quality control, the possibility of defects cannot be eliminated entirely. Therefore, we aim at providing the highest possible level of reliability and convenience by offering a warranty period of 6 years and direct, fast and straightforward RMA service.

Should you encounter any problems with your NA-HC4 chromax.black heatsink cover, please don't hesitate to contact our support team (support@noctua.at).