



HP L2445w 24-inch Widescreen LCD Monitor computer monitor 61 cm (24") 1920 x 1200 pixels

Brand : HP

Product code: KT931AA

Product name : L2445w 24-inch Widescreen LCD Monitor

24" widescreen LCD, 1920 x 1200, 5 ms, 400 cd/m2, 1000:1, 160°/160°, VGA & DVI-D
HP L2445w 24-inch Widescreen LCD Monitor. Display diagonal: 61 cm (24"), Display resolution: 1920 x 1200 pixels, Response time: 5 ms, Viewing angle, horizontal: 160°, Viewing angle, vertical: 160°



Display		Weight & dimensions	
Display diagonal *	61 cm (24")	Depth (without stand)	83 mm
Display resolution *	1920 x 1200 pixels	Height (without stand)	421 mm
Touchscreen *	✗	Weight (without stand)	9.8 kg
Display brightness (typical)	400 cd/m²	Packaging data	
Response time *	5 ms	Package dimensions (WxDxH)	672 x 464 x 352 mm
Contrast ratio (typical) *	1000:1	Package weight	12.8 kg
Viewing angle, horizontal	160°	Packaging content	
Viewing angle, vertical	160°	Bundled software HP Display Assistant is a software utility that enables theft deterrence and allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC; HP Display LiteSaver allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor; Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese	
Pixel pitch	0.270 x 0.270 mm		
Horizontal scan range	24 - 83 kHz		
Vertical scan range	50 - 76 Hz		
Pixel frequency	200 MHz		
Display scanning frequency	Horizontal Frequency: 24 to 83 kHz (VGA input), 24 to 83 KHz (DVI input for modes with pixel clock less than 165 MHz); Vertical Frequency: 50 to 76 Hz (VGA input), 50 to 76 Hz (DVI input for modes with pixel clock less than 165 MHz)		
Multimedia			
Built-in speaker(s) *	✗		
Built-in camera *	✗		
Ports & interfaces			
I/O ports	USB 2.0 Hub: self-powered, four ports (cable included)		
VGA (D-Sub) ports quantity	1		
DVI-D ports quantity	1		
Ergonomics			
Panel mounting interface	100 x 100 mm	Other features	
Cable lock slot *	✓	Country of origin	China

Ergonomics		Other features	
Cable lock slot type	Kensington	TV tuner integrated	✗
Adjustable height (max)	13 cm	Dimensions (W x D x H) (imperial)	565.4 x 301 x 526.8 mm (22.3 x 11.8 x 20.7")
Swivel angle range	-45 - 45°	Power requirements	100 - 240 V, 50 / 60 Hz
Tilt angle range	-5 - 35°		Preset VESA Graphic Modes (non-interlaced): 640 x 480 @ 60 Hz and 75 Hz, 800 x 600 @ 60 Hz and 75 Hz, 1024 x 768 @ 60 Hz and 75 Hz, 1280 x 960 @ 60 Hz, 1280 x 1024 @ 60 Hz and 75 Hz, 1440 x 900 @ 60 Hz, 1600 x 1000 @ 60 Hz, 1680 x 1050 @ 60 Hz, 1920 x 1200 @ 60 Hz; Text Mode: 720 x 400 @ 70 Hz; Mac Mode: 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
Plug and Play	✓		
Display tilt and swivel range	Tilt range: -5° to +35° vertical tilt, swivel range: -45° to +45°, height adjust: 130 mm, pivot rotation	Display resolution at frequency	
Power			
Power consumption (typical) *	85 W		
Power consumption (standby) *	2 W		
Operational conditions			
Operating temperature (T-T)	5 - 40 °C	Display video input type connector	VGA and DVI-D connectors, HDCP support
Storage temperature (T-T)	20 - 60 °C	Security features	Kensington Lock-ready
Operating relative humidity (H-H)	20 - 80%		Optional HP Silver LCD Speaker Bar: powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and external jack for headphones, part number EE418AA. For more information, refer to the product's Quick Specs. Optional HP LCD Monitor Quick Release: An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach a flat panel monitor to a variety of stands, brackets, arms or wall mounts, part number EM870AA. For more information, refer to the product's Quick Specs. Optional Kensington Security Lock: combines aircraft-grade steel and Kevlar fiber to securely lock down your monitor and help prevent theft, part number PC766A. For more information, refer to the product's Quick Specs
Storage relative humidity (H-H)	5 - 95%		Menu select, Auto adjust/OSD down, Input select/OSD up, Power Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management (power saver, sleep), factory reset
Weight & dimensions			
Width (with stand)	556 mm		
Depth (with stand)	253 mm		
Height (with stand)	521 mm		
Width (without stand)	565 mm		
		Multimedia	
		User controls	
		Weight (imperial)	21.8 lb
		Supplied AC adapter type	LCD, 1920 x 1200, No audio included at platform level
			TCO 03, ISO 13406-2 VDT Guidelines Approval, MPR-II Compliant, CISPR Requirements, VCCI Approvals, MIC (Korean) Requirements, CSA, Australian ACA Approval, "GS" Mark, TUV Approvals, CE Marking, FCC Approval, ENERGY STAR qualified, PC-2201 Certified Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2200, Microsoft Windows XP, and Windows Vista), EPEAT Silver, ENERGY STAR; EPEAT Silver
		Certification	



0883585877249




883585877249




0883585877256




883585877256

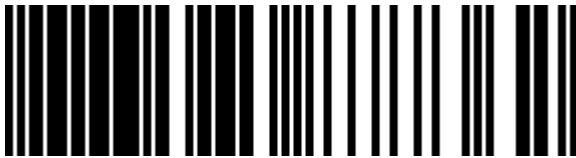

0883585877362



883585877362

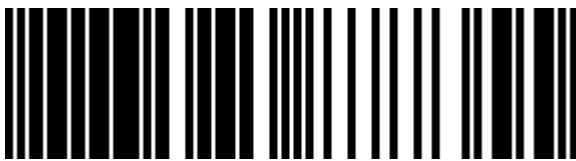

0883585877355



883585877355



0883585877348



883585877348



0883585877379



883585877379



0883585877331




883585877331



0883585877324



883585877324

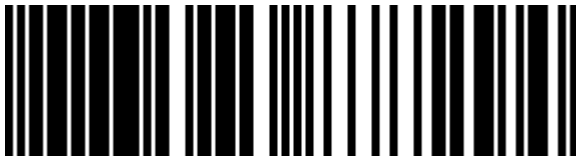

0883585877294



883585877294



0883585877263



883585877263



0883585877393



883585877393



0883585877317



883585877317



0883585877270




883585877270



0883585877386



883585877386

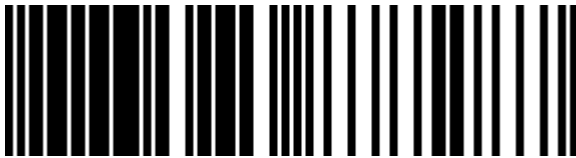

0883585877287



883585877287



0883585877300



883585877300



0883585877409



883585877409

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.