

Electrolux LFC316X Wall-mounted Stainless steel 420 m³/h

Brand : Electrolux

Product code: 942 022 004


Product name : LFC316X

Electrolux LFC316X. Maximum extraction power: 420 m³/h, Type of extraction: Ducted/Recirculating, Fluid dynamic efficiency class: E. Type: Wall-mounted, Product colour: Stainless steel, Control type: Buttons. Grease filter type: Metal, Number of filters: 2 pc(s). Bulb power: 4 W, Number of bulbs: 2 bulb(s), Bulb type: LED. Energy efficiency class: D, Annual energy consumption: 72.8 kWh, Energy efficiency scale: A+++ to G



Performance		Lighting	
Maximum extraction power *	420 m³/h	Bulb type	LED
Type of extraction *	Ducted/Recirculating	Colour temperature	3000 K
Fluid dynamic efficiency class *	E	Lighting position	Front
Lighting efficiency class *	E	Lighting efficiency (LE)	9.6 lux/W
Grease filtering efficiency class *	D	Power	
Number of speeds *	3	Energy efficiency class *	D
Intensive speed	✗	Energy efficiency scale	A+++ to G
Noise level *	66 dB	Connected load	128 W
Noise level (low speed)	53 dB	Motor power	120 W
Noise level (high speed)	66 dB	Power consumption (off)	0.01 W
Pressure (Pa)	235	Annual energy consumption *	72.8 kWh
Airflow (low speed)	235 m³/h	AC input voltage	220-240 V
Minimum distance from electric hob	50 cm	AC input frequency	50 Hz
Minimum distance from gas hob	65 cm	Energy efficiency class (old)	D
Design		Weight & dimensions	
Type *	Wall-mounted	Width *	598 mm
Product colour *	Stainless steel	Depth	450 mm
Control type	Buttons	Height	1020 mm
Cord length	1.36 m	Height (min)	69 cm
Built-in display *	✗	Height (max)	107 cm
Exhaust location	Top	Height without chimney	24 cm
Exhaust connection diameter	15 cm	Weight	7.4 kg
Number of motors	1	Packaging data	
Motor included	✓	Package width	650 mm
Filtering		Package depth	310 mm
Grease filter type *	Metal	Package height	555 mm
Number of filters	2 pc(s)	Package weight	9.62 kg
Removable filter	✓	Other features	
Washable filter	✓		

Lighting		Other features	
Bulb power	4 W	Filter	ECFB02ST ECFBPL01
Number of bulbs	2 bulb(s)	Measured air pressure at best efficiency point	151 Pa
		Grease filtering efficiency (GFE)	65.1%
		Fluid dynamic efficiency (FDE)	8.1
		Country of origin	Poland

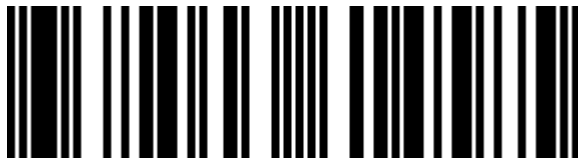

7332543614585

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.