



APC Symmetra LX UPS battery cabinet 5U

Brand : APC  
Product name : Symmetra LX  
Product code: SYARMXR3B3I



Symmetra LX Extended Run Rack-mount

APC Symmetra LX UPS battery cabinet 5U:

**Modular design**  
Increases adaptability with an open architecture configurable to any IT environment.

**Hot-swappable batteries**  
Ensures clean, uninterrupted power to protected equipment while batteries are being replaced

**Battery modules connected in parallel**  
Delivers higher availability through redundant batteries.

**User-replaceable batteries**  
Increases availability by allowing a trained user to perform upgrades and replacements of the batteries reducing Mean Time to Repair (MTTR)

**Plug-and-Play external batteries**  
Ensures clean, uninterrupted power to the loads when adding extra runtime to the UPS.  
APC Symmetra LX. Form factor: 5U, Product colour: Black. Battery technology: Sealed Lead Acid (VRLA).  
Certification: BSMI, EN 50091-1, EN 50091-2, EN 60950, IEC 60950, VCCI, VDE. Weight: 114.1 kg

| Design                      |                         | Operational conditions            |                                                              |
|-----------------------------|-------------------------|-----------------------------------|--------------------------------------------------------------|
| Form factor *               | 5U                      | Operating relative humidity (H-H) | 0 - 95%                                                      |
| Product colour              | Black                   | Storage relative humidity (H-H)   | 0 - 95%                                                      |
| Battery                     |                         | Operating altitude                | 0 - 3000 m                                                   |
| Battery technology          | Sealed Lead Acid (VRLA) | Certificates                      |                                                              |
| Operational conditions      |                         | Certification                     | BSMI, EN 50091-1, EN 50091-2, EN 60950, IEC 60950, VCCI, VDE |
| Operating temperature (T-T) | 0 - 40 °C               | Weight & dimensions               |                                                              |
| Storage temperature (T-T)   | -15 - 45 °C             | Weight                            | 114.1 kg                                                     |




5907176171679



7330381864483



8592978090500

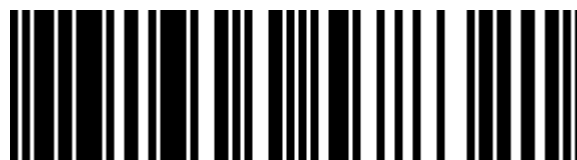

0731304578321



731304578321

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.