

## Whirlpool AKR 749/1 IX Semi built-in (pull out) Grey 304 m³/h

**Brand :** Whirlpool

**Product code:** 859991551230


**Product name :** AKR 749/1 IX

Whirlpool AKR 749/1 IX. Maximum extraction power: 304 m³/h, Type of extraction: Ducted/Recirculating, Fluid dynamic efficiency class: E. Type: Semi built-in (pull out), Product colour: Grey, Housing material: Stainless steel. Grease filter type: Aluminium. Bulb power: 2.5 W, Number of bulbs: 2 bulb(s), Bulb type: LED. Energy efficiency class: D, Annual energy consumption: 61.6 kWh, Energy efficiency scale: A+++ to D



| Performance                         |                          | Lighting                          |            |
|-------------------------------------|--------------------------|-----------------------------------|------------|
| Maximum extraction power *          | 304 m³/h                 | Number of bulbs                   | 2 bulb(s)  |
| Type of extraction *                | Ducted/Recirculating     | Bulb type                         | LED        |
| Fluid dynamic efficiency class *    | E                        | Lighting efficiency (LE)          | 12.1 lux/W |
| Lighting efficiency class *         | D                        | Power                             |            |
| Grease filtering efficiency class * | D                        | Energy efficiency class *         | D          |
| Maximum recirculating power         | 125 m³/h                 | Energy efficiency scale           | A+++ to D  |
| Number of speeds *                  | 3                        | Connected load                    | 121 W      |
| Boost function                      | ✗                        | Motor power                       | 116 W      |
| Noise level *                       | 62 dB                    | Annual energy consumption *       | 61.6 kWh   |
| Noise level (low speed)             | 46 dB                    | AC input voltage                  | 220 -240 V |
| Noise level (high speed)            | 62 dB                    | AC input frequency                | 50 - 60 Hz |
| Airflow (low speed)                 | 125 m³/h                 | Current                           | 0.5 A      |
| Design                              |                          | Energy efficiency class (old)     | D          |
| Type *                              | Semi built-in (pull out) | Weight & dimensions               |            |
| Product colour *                    | Grey                     | Width *                           | 599 mm     |
| Housing material                    | Stainless steel          | Depth                             | 300 mm     |
| Timer                               | ✓                        | Height                            | 180 mm     |
| Control type                        | Buttons                  | Height without chimney            | 21.1 cm    |
| Cord length                         | 1.5 m                    | Weight                            | 6 kg       |
| Built-in display *                  | ✗                        | Packaging data                    |            |
| Exhaust connection diameter         | 12 cm                    | Package width                     | 354 mm     |
| Number of motors                    | 1                        | Package depth                     | 241 mm     |
| Motor included                      | ✓                        | Package height                    | 634 mm     |
| Filtering                           |                          | Package weight                    | 7.24 kg    |
| Grease filter type *                | Aluminium                | Other features                    |            |
| Anti-odor filter                    | ✗                        | Electronic control                | ✗          |
| Washable filter                     | ✓                        | Grease filtering efficiency (GFE) | 66%        |

| Lighting   |       | Other features                 |      |
|------------|-------|--------------------------------|------|
| Bulb power | 2.5 W | Fluid dynamic efficiency (FDE) | 10.2 |

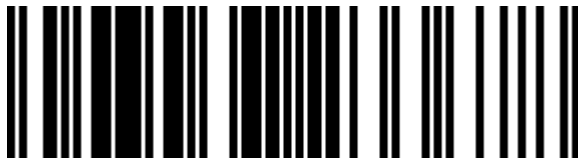

8003437233678

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.