

Manhattan USB-C to USB-A Cable, 15cm, Male to Female, 5 Gbps (USB 3.2 Gen1 aka USB 3.0), 3A (fast charging), SuperSpeed USB, Blue, Lifetime Warranty, Equivalent to USB31CAADP (except colour)



Brand : Manhattan

Product code: 353540

Product name : USB-C to USB-A Cable, 15cm, Male to Female, 5 Gbps (USB 3.2 Gen1 aka USB 3.0), 3A (fast charging), SuperSpeed USB, Blue, Lifetime Warranty, Equivalent to USB31CAADP (except colour)

- USB-C male to USB-A female
- Connects a USB 3.0 or 2.0 type-A device to a SuperSpeed type-C port
- Supports speeds of up to 5 Gbps
- Supports current of up to 3.0 A
- SuperSpeed USB for ultra-fast data transfer rates with zero data degradation
- Lifetime Warranty

USB-C to USB-A Cable, 15cm, Male to Female, 5 Gbps (USB 3.2 Gen1 aka USB 3.0), 3A (fast charging), SuperSpeed USB, Blue, Lifetime Warranty, Equivalent to USB31CAADP (except colour)

Manhattan USB-C to USB-A Cable, 15cm, Male to Female, 5 Gbps (USB 3.2 Gen1 aka USB 3.0), 3A (fast charging), SuperSpeed USB, Blue, Lifetime Warranty, Equivalent to USB31CAADP (except colour):

Manhattan SuperSpeed USB-C Cables easily connect USB-A peripherals and accessories with type-C device ports. Ideal for use with any USB type-A, plug-and-play devices. Manhattan SuperSpeed USB Type-C Cables support data transfer rates up to 5 Gbps on Windows and Mac systems for fast, reliable transmissions and current up to 3 amps. Nickel-plated contacts, shielding and fully moulded boots with strain relief help provide dependable connections, maximum conductivity and minimal data loss with reduced EMI interference.


Features		Features	
USB version *	USB 3.2 Gen 1 (3.1 Gen 1)	Maximum data transfer rate	5 Gbit/s
Connector 1 *	USB C	Product colour *	Blue
Connector 2 *	USB A	Cable colour	Blue
Connector gender	Male/Female	Weight & dimensions	
Connector 1 gender *	Male	Cable length *	0.15 m
Connector 2 gender *	Female	Weight	58 g
Connector 1 form factor	Straight	Packaging data	
Connector 2 form factor	Straight	Package type	Polybag
AWG wire size	30	Packaging content	
Connector contacts plating	Nickel	Quantity per pack *	1 pc(s)
Magnetically shielded	✓	Certificates	
Cable jacket material	Polyvinyl chloride (PVC)	Certification	UL 2725 USB 3.2 Gen 1
Maximum data transfer rate	5000 Mbit/s	Logistics data	
		Harmonized System (HS) code	84733080



0766623353540



766623353540

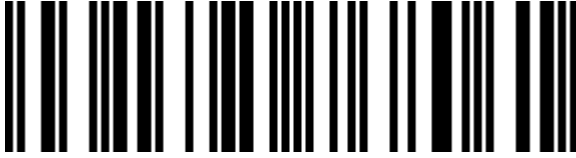

6061395768061



7666233535400

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.