

Viewsonic Display VG3419C computer monitor 86.4 cm (34") 3440 x 1440 pixels UltraWide Quad HD LED Black

Brand : Viewsonic

Product code: VG3419C

Product name : Display VG3419C

- UWQHD 3440 x 1440 resolution on a 21:9 ultra-wide screen
- Integrated Docking Station with USB Type-C and Ethernet
- 1500R Curved Panel
- 120Hz AMD FreeSync™ Premium for smooth, continuous visuals
- Advanced ergonomics with height adjustment and a -3.5°~23° tilt angle


34 in, VA, 3440 x 1440m, UltraWide QHD, 21:9, LED, 300 cd/m², 16.7M, 66W, 100-240V, 809 x 443.8-593.8 x 269mm

Viewsonic Display VG3419C. Display diagonal: 86.4 cm (34"), Display resolution: 3440 x 1440 pixels, HD type: UltraWide Quad HD, Display technology: LED, Response time: 3.5 ms, Native aspect ratio: 21:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). Built-in USB hub, USB hub version: 3.2 Gen 1 (3.1 Gen 1). VESA mounting, Height adjustment. Product colour: Black



Display		Ports & interfaces	
Display diagonal *	86.4 cm (34")	Headphone connectivity	3.5 mm
Display resolution *	3440 x 1440 pixels	Built-in KVM switch	✓
HD type *	UltraWide Quad HD	AC (power) in	✓
Native aspect ratio *	21:9	Network	
Display technology *	LED	Ethernet LAN	✓
Panel type *	VA	Ergonomics	
Backlight type	LED	VESA mounting *	✓
Display brightness (typical)	300 cd/m²	Panel mounting interface	100 x 100 mm
Response time *	3.5 ms	Cable management	✓
Anti-glare screen	✓	Cable lock slot *	✓
Screen shape *	Curved	Cable lock slot type	Kensington
Screen curvature rating	1500R	Height adjustment *	✓
Contrast ratio (typical) *	3000:1	Adjustable height (max)	15 cm
Contrast ratio (dynamic)	80000000:1	Tilt adjustment	✓
Maximum refresh rate *	120 Hz	Tilt angle range	-3.5 - 23°
Viewing angle, horizontal	178°	On Screen Display (OSD)	✓
Viewing angle, vertical	178°	Power	
Display number of colours *	16.7 million colours	Energy efficiency class (SDR) *	G
Response time (fast)	0.4 ms	Energy efficiency class (HDR) *	G
Pixel pitch	0.232 x 0.232 mm	Energy consumption (SDR) per 1000 hours *	32 kWh
Digital horizontal frequency	30 - 185 kHz	Energy consumption (HDR) per 1000 hours *	57 kWh
Digital vertical frequency	24 - 120 Hz	Power consumption (typical) *	56 W
Display diagonal (metric)	86 cm	Power consumption (standby) *	0.3 W
Surface hardness	3H	Power consumption (max)	66 W
Colour gamut standard	sRGB	AC input voltage	100 - 240 V
Colour gamut	121%	Power supply type	Internal
sRGB coverage (typical)	100%	Energy efficiency scale	A to G
NTSC coverage (typical)	86%	Operational conditions	
Performance		Operating temperature (T-T)	0 - 40 °C
AMD FreeSync *	✓		
AMD FreeSync type	FreeSync Premium		
Flicker-free technology	✓		

Performance		Operational conditions	
Low Blue Light technology	✓	Operating relative humidity (H-H)	20 - 90%
Multimedia		Weight & dimensions	
Number of speakers	2	Width (with stand)	809 mm
RMS rated power	4 W	Depth (with stand)	269 mm
Built-in speaker(s) *	✓	Height (with stand)	593.8 mm
Design		Weight (with stand)	10.6 kg
Product colour *	Black	Width (without stand)	809 mm
Ports & interfaces		Depth (without stand)	107 mm
Built-in USB hub *	✓	Height (without stand)	366 mm
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Weight (without stand)	6.8 kg
USB upstream port type	USB Type-B, USB Type-C	Packaging data	
Number of upstream ports	2	Package width	980 mm
Number of USB Type-B upstream ports quantity	1	Package depth	224 mm
Number of USB Type-C upstream ports quantity	1	Package height	526 mm
USB Type-A downstream ports quantity	3	Package weight	14 kg
USB Type-C DisplayPort Alternate Mode	✓	Packaging content	
USB Power Delivery (USB PD)	✓	Stand included	✓
USB Power Delivery up to	65 W	Cables included	AC, HDMI, USB Type-A to USB Type-B, USB Type-C
HDMI *	✓	Quick start guide	✓
HDMI ports quantity	1	Other features	
HDMI version	2.0	Weight	10.5 kg
DisplayPorts quantity	1	Logistics data	
DisplayPort version	1.4	Products per master (outer) case	1 pc(s)
Audio output	✓	Pallet gross width	120 cm
Headphone out *	✓	Pallet gross length	100 cm
		Pallet gross height	2.25 m
		Harmonized System (HS) code	8528521000

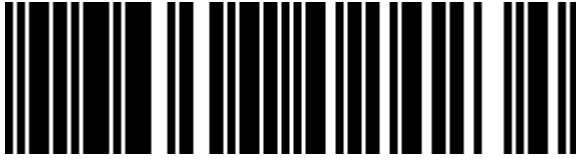

0766907024234



766907024234

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.