



## APC Smart-UPS On-Line, 1500VA/1500W, Rackmount 2U, 230V, 6x C13 IEC outlets, SmartSlot, Extended runtime, W/ rail kit

**Brand :** APC

**Product code:** SRT1500RMXLI



**Product name :** Smart-UPS On-Line, 1500VA/1500W, Rackmount 2U, 230V, 6x C13 IEC outlets, SmartSlot, Extended runtime, W/ rail kit


Smart-UPS On-Line, 1500VA/1500W, Rackmount 2U, 230V, 6x C13 IEC outlets, SmartSlot, Extended runtime, W/ rail kit

APC Smart-UPS On-Line, 1500VA/1500W, Rackmount 2U, 230V, 6x C13 IEC outlets, SmartSlot, Extended runtime, W/ rail kit. UPS topology: Double-conversion (Online), Output power capacity: 1.5 kVA, Output power: 1500 W. AC outlet types: C13 coupler, AC outlets quantity: 6 AC outlet(s), Serial interface type: RJ-45. Battery technology: Sealed Lead Acid (VRLA), Battery life (max): 5 year(s), Battery recharge time: 3 h. Form factor: Rackmount, Product colour: Black, Cable length: 1.83 m. Compliance certificates: RoHS, Certification: CE, EAC



| Features                        |                            | Design                             |               |
|---------------------------------|----------------------------|------------------------------------|---------------|
| UPS topology *                  | Double-conversion (Online) | Product colour *                   | Black         |
| Output power capacity *         | 1.5 kVA                    | Display type                       | LCD           |
| Output power *                  | 1500 W                     | LED indicators                     | Status        |
| Waveform *                      | Sine                       | International Protection (IP) code | IP20          |
| Input operation voltage (min) * | 50 V                       | <b>Operational conditions</b>      |               |
| Input operation voltage (max) * | 150 V                      | Operating temperature (T-T)        | 0 - 40 °C     |
| Input frequency *               | 40/70 Hz                   | Storage temperature (T-T)          | -20 - 50 °C   |
| Output operation voltage (min)  | 220 V                      | Operating relative humidity (H-H)  | 0 - 95%       |
| Output operation voltage (max)  | 240 V                      | Storage relative humidity (H-H)    | 0 - 95%       |
| Output frequency                | 50/60 Hz                   | <b>Certificates</b>                |               |
| Surge energy rating             | 432 J                      | Compliance certificates            | RoHS          |
| Crest factor                    | 3:1                        | Certification                      | CE, EAC       |
| Emergency Power Off (EPO)       | ✓                          | <b>Packaging content</b>           |               |
| Noise level                     | 50 dB                      | Management card included           | ✗             |
| Audible alarm(s)                | ✓                          | Manual                             | ✓             |
| Ports & interfaces              |                            | <b>Sustainability</b>              |               |
| AC outlet types                 | C13 coupler                | Sustainability certificates        | Green Premium |
| AC outlets quantity             | 6 AC outlet(s)             | <b>Weight &amp; dimensions</b>     |               |
| USB port                        | ✓                          | Width                              | 432 mm        |
| Serial interface                | ✓                          | Depth                              | 505 mm        |
| Serial interface type           | RJ-45                      | Height                             | 85 mm         |
| SmartSlot                       | ✓                          | Weight                             | 21 kg         |
| SmartConnect port               | ✗                          | <b>Packaging data</b>              |               |
| Battery                         |                            | Package width                      | 594 mm        |
| Battery technology              | Sealed Lead Acid (VRLA)    | Package depth                      | 749 mm        |
| Battery life (max)              | 5 year(s)                  | Package height                     | 246 mm        |
| Battery recharge time           | 3 h                        |                                    |               |

| Battery          |           | Packaging data                      |          |
|------------------|-----------|-------------------------------------|----------|
| Hot-swap battery | ✓         | Package weight                      | 29.6 kg  |
| Design           |           | Logistics data                      |          |
| Form factor *    | Rackmount | Products per pallet                 | 12 pc(s) |
| Cable length     | 1.83 m    | Harmonized System (HS) code         | 85078000 |
|                  |           | Total carbon footprint (kg of CO2e) | 2577.53  |

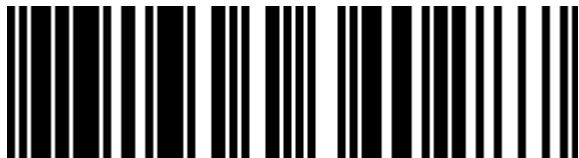

0731304340287



731304340287

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.